


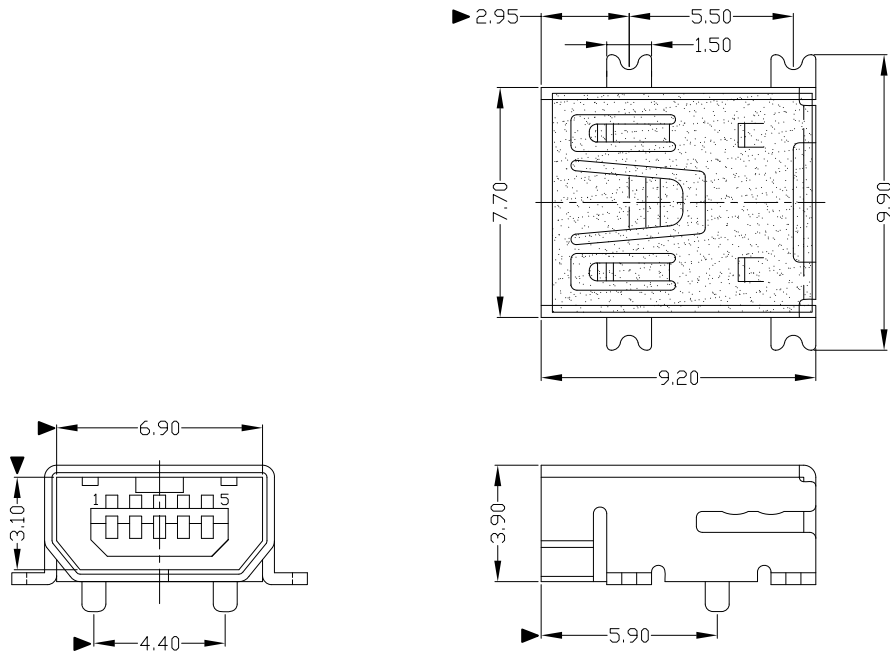

NOTES:



1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
- 2) INSULATION RESISTANCE: 100MΩ MIN;
- 3) CONTACT RESISTANCE: 50mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 300V AC;
- 5) OPERATING TEMPERATURE:-55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 30N MAX
- 2) Unmating Force: 7N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

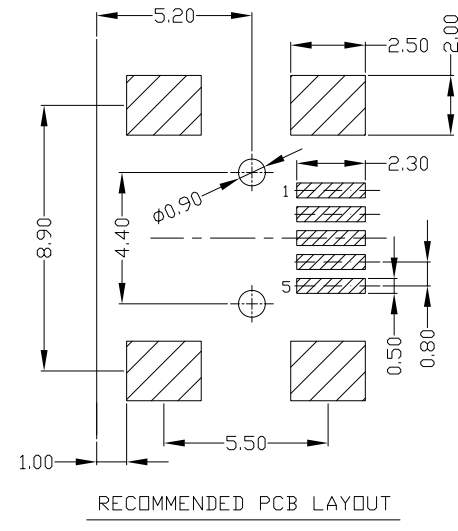

Bill of materials:

3	HOUSING	LCP	1	UL94V-0
2	SHELL	COPPER ALLOY	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN
NO	PARTS	MATERIAL	QTY	FINISHING

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.35

.X ± 0.30

.XX ± 0.25

.XXX ± 0.15

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MSB-SWE55PC-5AB-LF
SERIES
LEADFREE
5 PIN AB TYPE
MYLAR
POST
EAR TO EAR 5.5mm
90°SMT
FEMALE

DESCRIPTION: MINI USB 5P/F SMT (AB型双卡点1.0柱) 貼MYLAR