


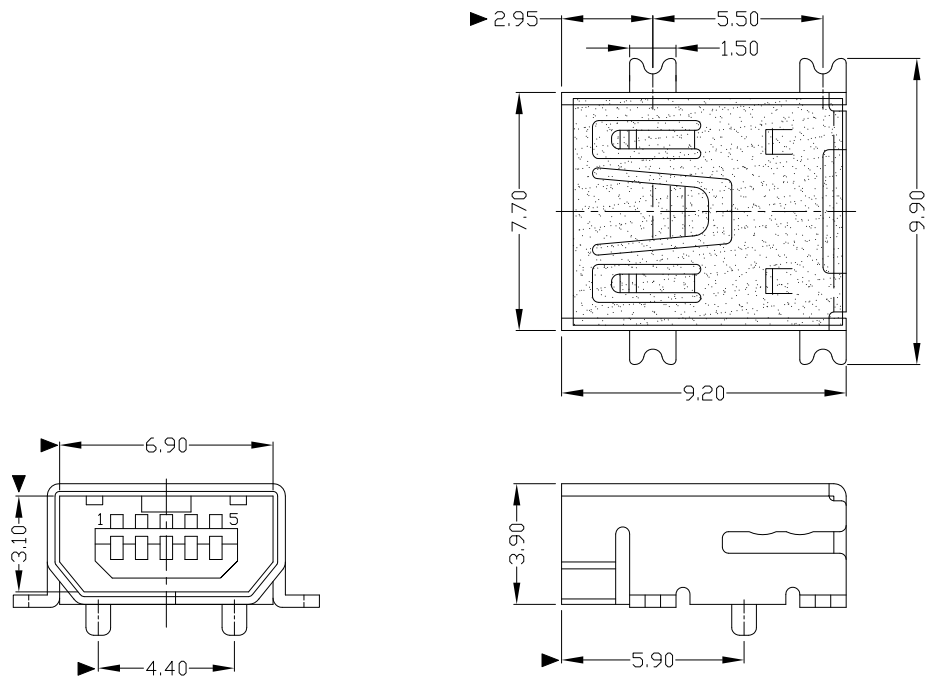

NOTES:



1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
- 2) INSULATION RESISTANCE: 100M Ω MIN;
- 3) CONTACT RESISTANCE: 50m Ω MAX;
- 4) WITHSTANDING VOLTAGE: 300V AC;
- 5) OPERATING TEMPERATURE:-55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 30N MAX
- 2) Unmating Force: 7N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

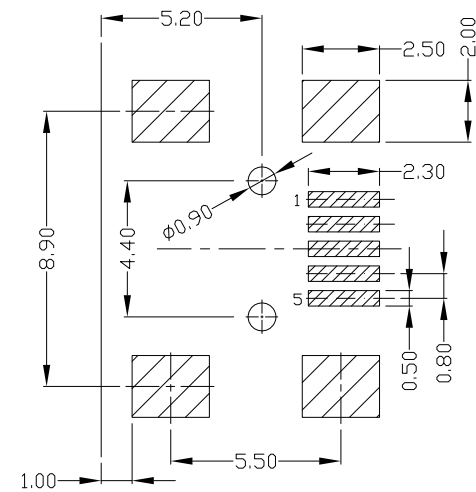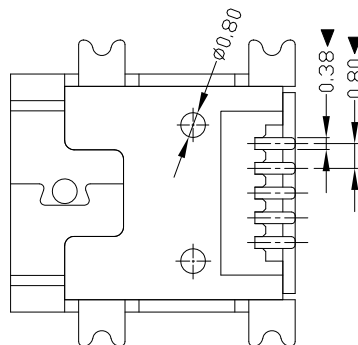

RECOMMENDED PCB LAYOUT

Bill of materials:

3	HOUSING	LCP+30%GF	1	UL94V-0
2	SHELL	BRASS C2680 T=0.40mm	1	PLATED NICKEL
1	TERMINAL	PHOSPHOR BRONZE C5191 T=0.20mm	5	PLATED GOLD/TIN
NO	PARTS	MATERIAL	QTY	FINISHING

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.35

.X ± 0.30

.XX ± 0.25

.XXX ± 0.15

ANG $\pm$


PPOJECTION

照片框


ORDER INFORMATION

MSB-SWE55PCR-5AB-LF
SERIES T T T T T LEADFREE
FEMALE REEL 5 PIN AB TYPE
90°SMT POST MYLAR
EAR TO EAR 5.5mm


DESCRIPTION: MINI USB 5P/F SMT (AB型双卡点1.0柱) 貼MYLAR

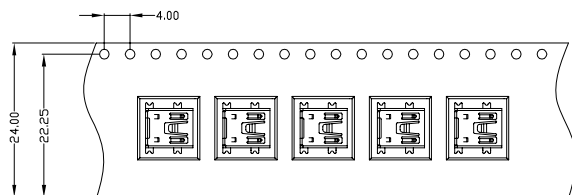


① 载带

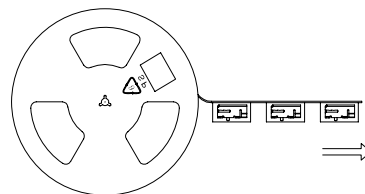


② 750pcs/盘

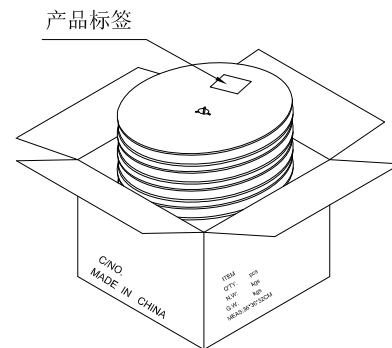


③ 10盘/箱 (7.5Kpcs)

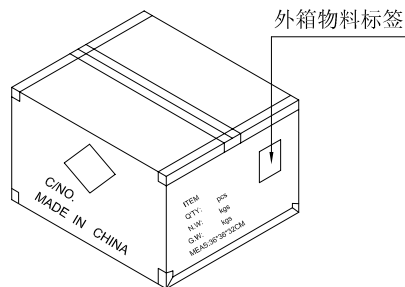

⑤ 依图示粘贴产品或ROHS标签.



④ 外箱用透明胶纸带封“工”字型.

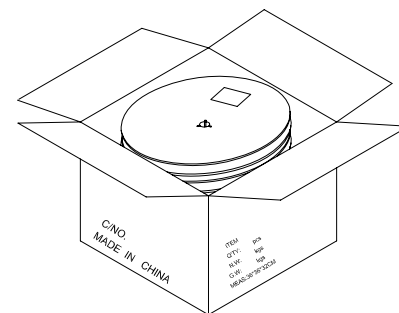

备注:

1. 胶盘规格: 外圆*厚度: 330*28mm
2. 每盘750pcs; 每箱装10盘 (7.5Kpcs);
3. 外箱尺寸: 36*36*32cm ;
4. 产品重量: 0.6g/pcs 产品净重: 4.5kg/箱 产品毛重: 8.4kg/箱
5. 外箱用透明胶纸带封“工”字型; 贴好产品/ROHS标签.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.35

.X ± 0.30

.XX ± 0.25

.XXX ± 0.15

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

MSB-SWE55PCR-5AB-LF
SERIES
FEMALE
90°SMT
LEADFREE
5 PIN AB TYPE
REEL
MYLAR
POST
EAR TO EAR 5.5mm

DESCRIPTION: MINI USB 5P/F SMT (AB型双卡点1.0柱) 贴MYLAR