


Recommend P.C.B LAYOUT

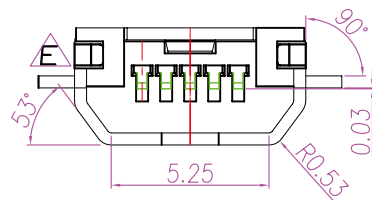

備註 /NOTE:

1. 安規
 - 1-1. 規格 /RATING: 5V / 1A
 - 1-2. 絕緣阻抗 /Insulation Resistance: 100M ohm Min at DC 500V
 - 1-3. 絕緣耐壓 /Dielectric Withstanding Voltage: AC 100V for 1 Minute
 - 1-4. 接觸阻抗 /Contact Resistance: 30m ohm or less
2. 材質 /MATERIAL:
 - 2-1. 膠芯 /Housing: LCP Δ B
 - 2-2. 針 /Pin: 磷銅 /PHOSPHOR BRONZE
 - 2-3. 銅殼 /Shell: 黃銅 /BRASS Δ B
3. 電鍍 /electroplate
 - 3-1. 針 /Pin: 金 10u" /GOLD 10u", 霧錫 /TIN
 - 3-2. 銅殼 /Shell: 鍍 60u" /NI 60u"

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1


DATE

SIZE A4


TOLERANCES ARE

X, \pm
 .X \pm 0.20
 .XX \pm 0.10
 .XXX \pm
 ANG \pm

P PROJECTION



ORDER INFORMATION

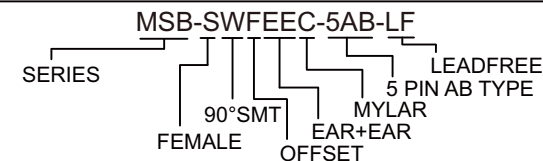

DESCRIPTION: Mini Usb 5Pin 沉式 SMT