

Recommend P.C.B LAYOUT

備註 / NOTE:

1. 安規
  - 1-1. 規格 / RATING: 5V / 1A
  - 1-2. 絕緣阻抗 / Insulation Resistance: 100M ohm Min at DC 500V
  - 1-3. 絕緣耐壓 / Dielectric Withstanding Voltage: AC100V for 1 Minute
  - 1-4. 接觸阻抗 / Contact Resistance: 30m ohm or less
2. 材質 / MATERIAL:
  - 2-1. 膠芯 / Housing: LCP
  - 2-2. 針 / Pin: 磷銅 / PHOSPHOR BRONZE
  - 2-3. 銅殼 / Shell: 黃銅 / BRASS
3. 電鍍 / electroplate
  - 3-1. 針 / Pin: 半金10u"鍍金 / GOLD10u"鍍
  - 3-2. 銅殼 / Shell: 霧銅 / TIN

RoHS Compliant

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4


P PROJECTION

TOLERANCES ARE

X. ±  
.X ±  
.XX ± 0.20  
.XXX ± 0.10  
ANG ±



ORDER INFORMATION

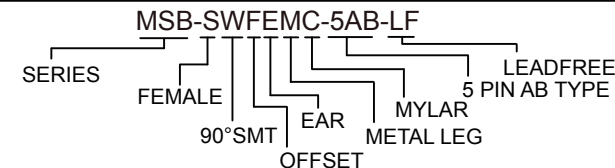

DESCRIPTION: MINI USB 5PIN(F) 沉板式 DIP