

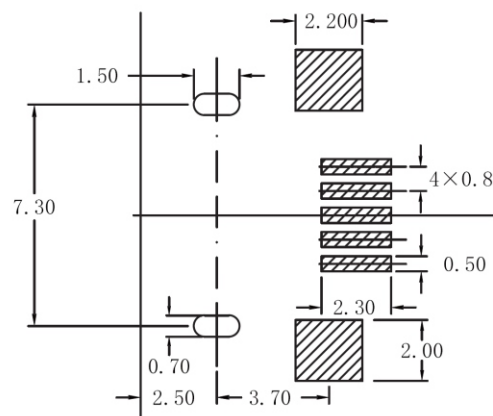
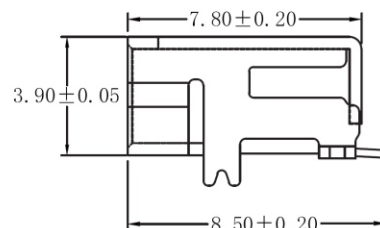
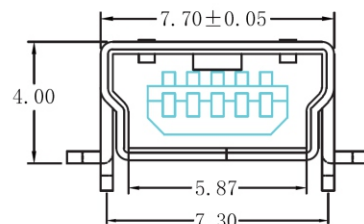


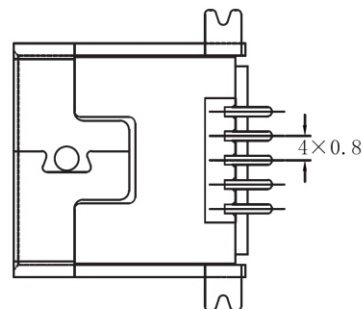

RECOMMENDED PCB LAYOUT



规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.0A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
50 milliohms MAX
4. 耐电压:Dielectric Withstanding Voltage:
300 V AC AT Sea Level
5. 绝缘阻抗:Insulation Resistance:
100MEGA ohms MIN

原材料:Raw material:

1. 塑胶:Plastic cement:
Hing Temperature Thermoplastics,
LCP Black
2. 端子:Contact:Copper Alloy C2680/C5191
3. 外壳:Shell: Copper Alloy C2680

电镀:Electroplate:

1. 端子:Contact: Piated Gold in Mating Area;
Tin On Solder Talls
2. 外壳:Shell:
Nickel Plating

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

MSB-SWME37C-5B-LF
SERIES | LEADFREE
FEMALE | 5 PIN B TYPE
MYLAR
METAL FOOT TO EAR 3.70mm
90°SMT

DESCRIPTION: MINI USB 5P/F 短體前插后貼(無柱)