


Specifications:
 Current Rating:1.0A AC/DC
 Voltage Rating:30V AC/DC
 Contact Resistance:20m ohm. Max.
 Insulation Resistance:1,000M ohm. min.
 Withstanding Voltage:750V AC For One Minute
 Operating Temperature Range:-40°C ~ +105°C
 Material and Finish
 Insulator:High Temp. plastic(LCP UL94V-0)
 Insulator Color:Black
 Contact:Phosphor Bronze
 Plating:Gold Plated on Contact Area,
 Tin Plated on Solder Tail.
 Shell:Brass,Tin Plated
 Packing:700pcs/Reel

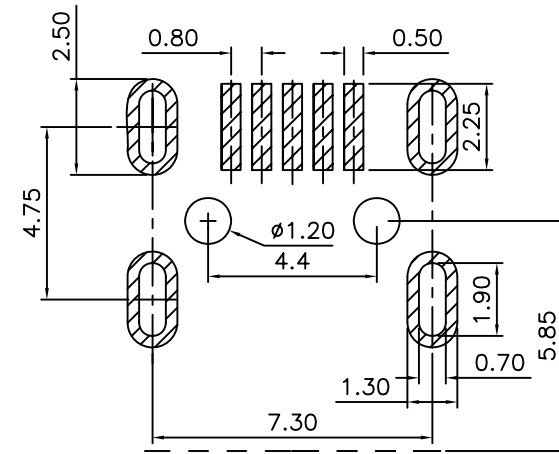

Recommended PCB Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

X, ±
 .X ± 0.20

CHECKED BY GENIUS

.XX ± 0.15

UNIT / mm

SCALE 1 : 1


.XXX ±

ANG ±

DATE

SIZE A4

PPOJECTION



ORDER INFORMATION

MSB-SWMMPC-5B-LF
 SERIES | | | | LEADFREE
 FEMALE | | | | 5 PIN B TYPE
 90°SMT | | MYLAR
 POST
 METAL FOOT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: MINI USB 5S B Type