

Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Phosphor Bronze.

Shield Case: Brass.

Plating: Selective Gold plated.

Electrical Characteristics:

Current Rating: 1 AMP.


Dielectric Withstanding Voltage: AC 100V For 1 minute

Insulator Resistance: 100MΩ min. at DC 250V.

Contact Resistance: 50mΩ max. at DC 100mA.

Operating Temperature: -20°C ~ +85°C.

***RoHS Compliant**

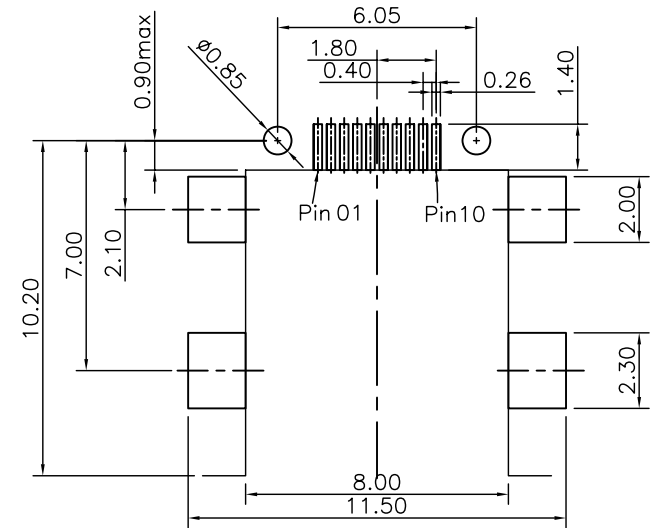

P.C. Board Layout
(Tolerance: ±0.05)

MSB-SWRV-10AB-LF
LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. MSB-SWRV-10AB

DWG NO. MSB-SWRV-10AB

CHECKED BY CY

TOLERANCES ARE

DESCRIPTION:

FILE NO.

DRAWING BY

.X ± 0.2

.XX ±

.XXX ±

AWG

AREA

REVISIONS

HK

DATE

焯倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

