


1. DAT1	MIDDLE	7. NC	MIDDLE
2. DAT0	MIDDLE	8. VSS	LONG
3. VSS	MIDDLE	9. CMD	MIDDLE
4. CLK	MIDDLE	10. CD/DAT3	SHORT
5. VDD	LONG	11. DAT2	MIDDLE
6. NC	MIDDLE		

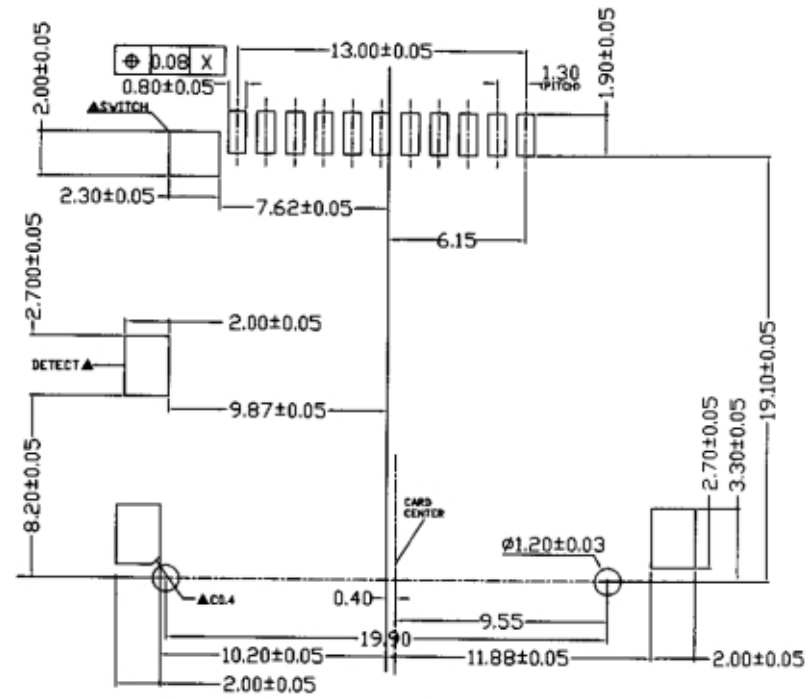

P.C.B layout

NOTES:
 MATERIAL
 HOUSING:HIGH TEMPERATURE THERMOPLASTIC
 CONTACT:COPER ALLOY
 SHELL:COPPER ALLOY
 PLATING
 CONTACT AREA:GOLD PLATED OVER NI
 SOLDER TAIL:100u" MIN Sn/Pb PLATED OVER NI
 SHELL SOLDER AREA:GOLD PLATED OVER NI
 PATING
 CURRENT RATING:0.5A
 VOLTAGE RATING:250VRMS
 OPERATING
 TEMPERATURE:-25C--+90C
 SPECIFICATION
 CONTACT RESISTANCE:40 MILLIOHMS
 DIELECTRIC WITHSTANDING VOLTAGE:500VAC MEGOHMS
 INSULATION RESISTANCE:100 MEGOHMS

MSDC-W19PA-11-LF
 LEADFREE
 RoHS Compliant



PART NO. MSDC-W19PA-11

DWG NO. MSDC-W19PA-11

CHECKED BY CY

TOLERANCES ARE

DESCRIPTION:

FILE NO.

DRAWING BY

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

AREA	REVISIONS	HK	DATE
------	-----------	----	------

UNIT / mm

SCALE 1:1

PROJECTION

煜倫股份有限公司