


1. DAT1	MIDDLE	7. NC	MIDDLE
2. DAT0	MIDDLE	8. VSS	LONG
3. VSS	MIDDLE	9. CMD	MIDDLE
4. CLK	MIDDLE	10. CD/DAT3	SHORT
5. VDD	LONG	11. DAT2	MIDDLE
6. NC	MIDDLE		

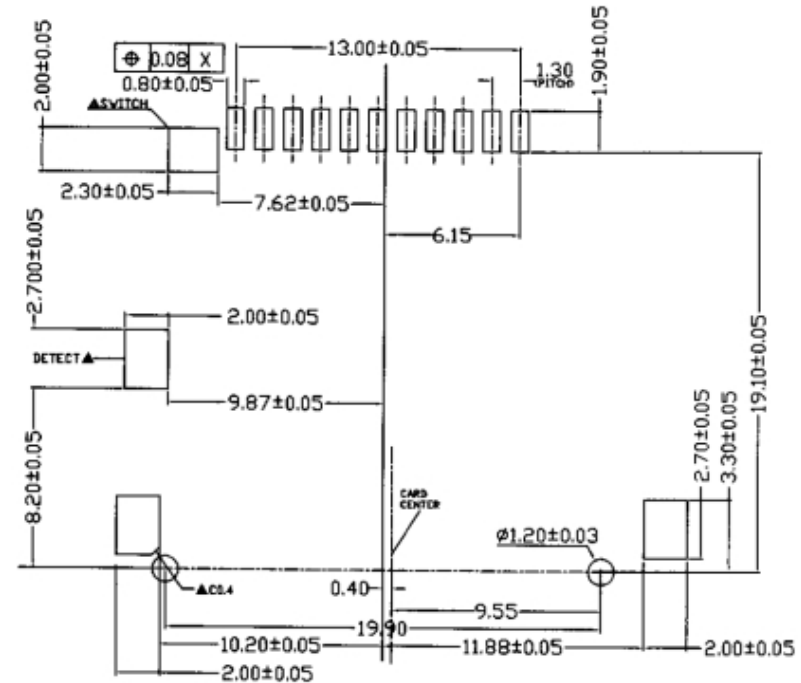

P.C.B layout

NOTES:
 MATERIAL
 HOUSING:HIGH TEMPERATURE THERMOPLASTIC
 CONTACT:COOPER ALLOY
 SHELL:COOPER ALLOY
 PLATING
 CONTACT AREA:GOLD PLATED OVER NI
 SOLDER TAIL:100u" MIN Sn/Pb PLATED OVER NI
 SHELL SOLDER AREA:GOLD PLATED OVER NI
 PATING
 CURRENT RATING:0.5A
 VOLTAGE RATING:250VRMS
 OPERATING
 TEMPERATURE:-25C--+90C
 SPECIFICATION
 CONTACT RESISTANCE:40 MILLIOHMS
 DIELECTRIC WITHSTANDING VOLTAGE:500VAC MEGOHMS
 INSULATION RESISTANCE:100 MEGOHMS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X, ±

UNIT / mm

SCALE 1 : 1

.XX, ±


DATE

.XXX, ±

ANG, ±

SIZE A4

P PROJECTION



ORDER INFORMATION

MSDC-W19PA-11-LF

SERIES | | | | LEADFREE
 | | | | 11 WAY
 | | | | UPPER CONTACT
 | | | | PUSH PUSH
 | | | | POST 19.90mm
 90°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: