


SMA JACK
1/4" - 36UNS - THREAD

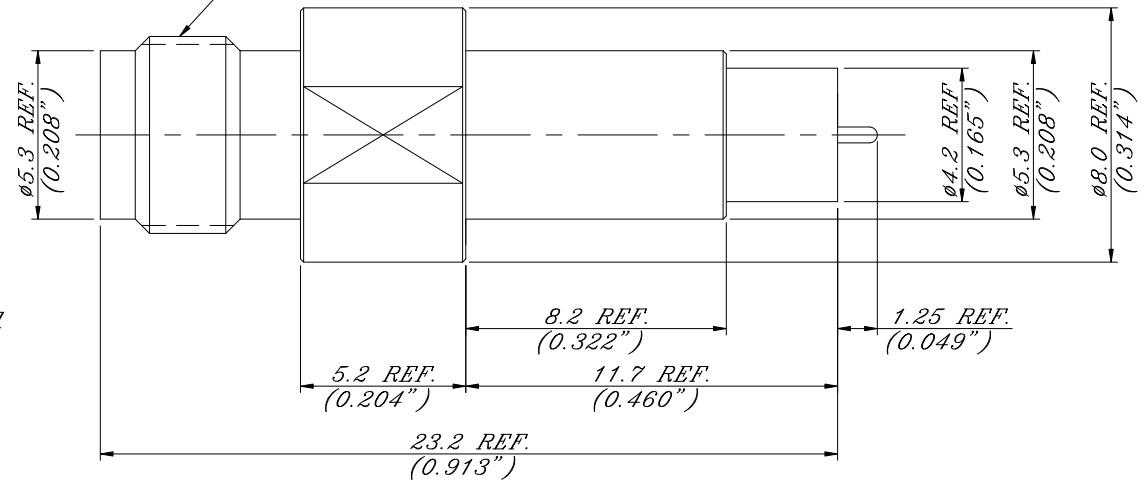

1. DIMENSION:

Unless otherwise specified all Dimensions in millimeters & inches. Values in brackets are inches equivalents.

MSHSMA-ES-1S1S-LF
LEADFREE

RoHS Compliant

PERFORMANCE	
ITEM	SPECIFICATION
FREQUENCY RATING	DC to 6GHz
NOMINAL IMPEDANCE	50 ohm
TEMPERATURE RANGE	-40 to +90 °C
VOLTAGE RATING	250V r.m.s
CONTACT RESISTANCE	20m ohm max.
WITHSTANDING VOLTAGE	AC 300V
INSULATION RESISTANCE	500M ohm min.
V.S.W.R	DC to 6GHz 1.3 max.
DURABILITY	10,000 CYCLES

NO	DESCRIPTION	MATERIAL & TREATMENT	REMARK
1	SMA SHELL	STAIN LESS STEEL	
2	REAR SHELL	BRASS WITH NICKEL PLATING	
3	GROUND CONTACT	STAIN LESS STEEL	
4	INSULATORS	TEFLON	
5	SPRING	PIANO WIRE	
6	FEMALE CONTACT	PHOSPHORUS BRONZE WITH GOLD PLATING	
7	CENTER CONTACT	BRASS WITH GOLD PLATING	

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. MSHSMA-ES-1S1S

DWG NO. MSHSMA-ES-1S1S

CHECKED BY CY

TOLERANCES ARE

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

DESCRIPTION: MEASUREMENT ADAPTOR

焯倫股份有限公司


FILE NO.

DRAWING BY

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE