


Receptacle for pins: $\varnothing 0.40 \sim 0.56\text{mm}$
(0.0157" ~ 0.0220")

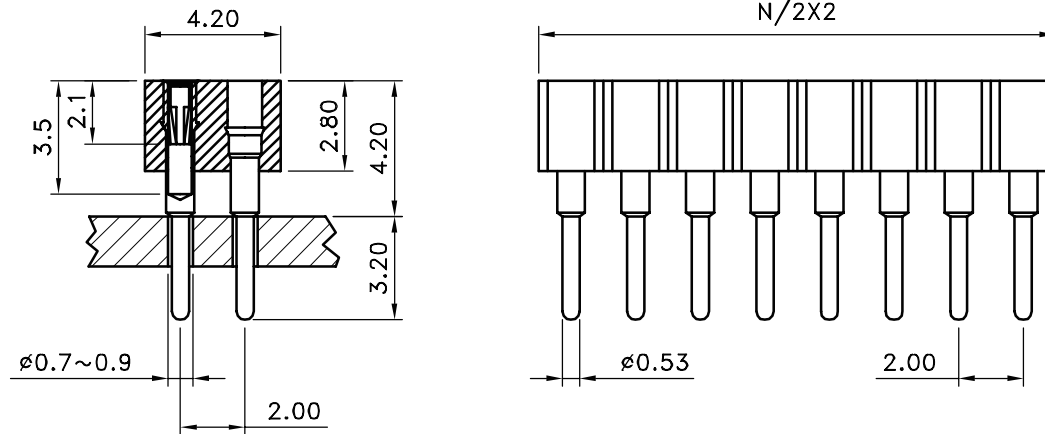

MATERIAL & FINISH

*precision swiss screw machine contact tap entry for easy insertion.

*4 fingers contact for very low insertion force.

*resistance to solder heat : Up to 260 °C 1 minute without any plastic deformation.

*Insulator: Polyphenylene sulphide (PBT) UL 94V-0

*standard color:black

*contact:inner clip,beryllium copper. 5u"/ 10u' or 30u',gold over 50u" nickel.

Outer sleeve, brass, 150u" tin over 50u" nickel or 10u" gold over nickel.

*contact resistance:Max. 10 Milliohm

*Insulation resistance: 5000 Mege Ohm at 500 VDC.

*Dielectric Withstanding voltage: 1000 VAC (RMS) minimum.

*Temperature rating: -55° C to +175° C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MSS-D-2Xxx-LF
SERIES | LEADFREE
2X02:04 WAY
2X40:80 WAY
DIP 90°

DESCRIPTION: 2.0mm PCB Socket Double Rows Str