


PIN ASSIGNMENT:

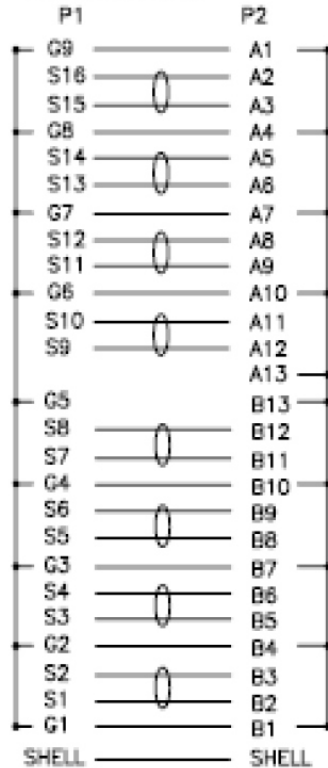

Electrical character:

- a. 100% open & short testing.
- b. Withstanding voltage: DC 300V 0.01Sec.
- c. Insulation resistance: 10M Ohm(Min).
- d. Conductive resistance: 2 Ohm(Max).

3	CONN.2	SAS 4x PLUG CONNECTOR	
2	CONN.1	MINI SAS 4x PLUG CONNECTOR	
1	CABLE	(2BAM0*2C+D+HMAM+HM)*SPCS+M+AM+B BLACK	
NO.	PART NAME	SPEC DESCRIPTION	REMARK

MSSSAS-2626-E1M-LF
LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. MSSSAS-2626-E1M

DWG NO. MSSSAS-2626-E1M

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG


DESCRIPTION:

焯倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE