



PIN ASSIGNMENT:

P1 SAS 4i (HOST) P2 Mini SAS 4i (TARGET)

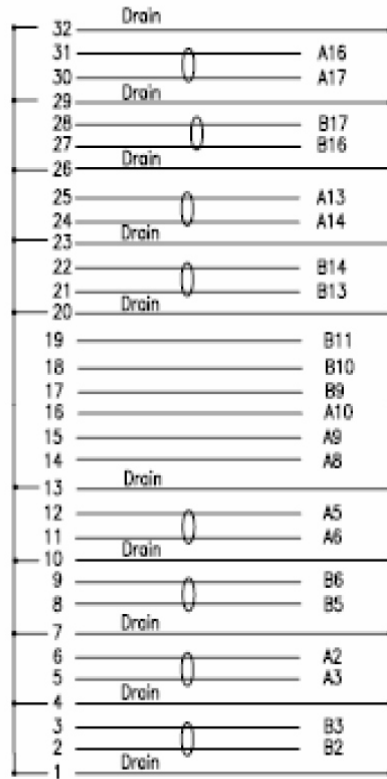

A1;A4;A7;A12;A15;A18
B1;B4;B7;B12;B15;B18

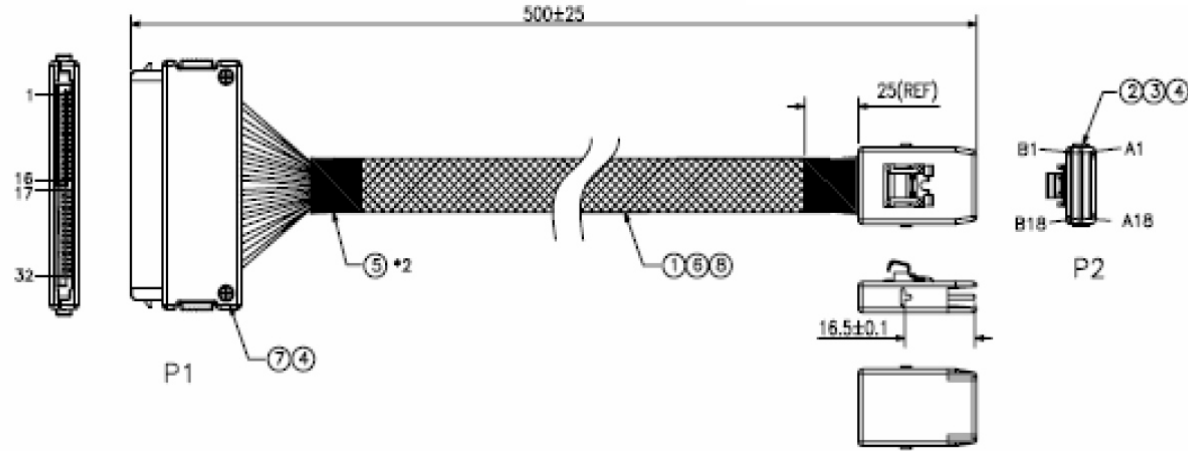

ELECTRICAL CHARACTER:

- a. 100% OPEN&SHORT TESTING
- b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec
- c. INSULATION RESISTANCE:10M Ohm(Min)
- d. CONDUCTIVE RESISTANCE:5 Ohm(Max).

| | | | |
|-----|-----------|--|--------|
| 8 | CABLE 2 | UL2651 28AWG*BC FLAT CABLE GRAY | |
| 7 | CONN 2 | SAS 4i CABLE RECEPTACLE (32P CONNECTOR) | |
| 6 | TUBE | WOVEN SLEEVING TUBE BLACK | |
| 5 | H.S.T | HEAT SHRINK TUBE BLACK ID:9.5mm | |
| 4 | PE | PE LOW DESNGIE | |
| 3 | PVC | PVC 25Pa BLACK UL94V-0 | |
| 2 | CONN 1 | MINI SAS 4i PLUG CONNECTOR W/LATCH W/PCB | |
| 1 | CABLE 1 | (28AWG*20+20)*AL*MYLAR+MYLAR W/O JACKET | |
| NO. | PART NAME | SPEC DESCRIPTION | REMAKE |

MSSSAS-3632-E50C-LF
LEADFREE

RoHS Compliant

MORE THAN ALL
CONNECTORS
ASSEMBLIES

PART NO. MSSSAS-3632-E50C

DWG NO. MSSSAS-3632-E50C

CHECKED BY CY

TOLERANCES ARE

DESCRIPTION:

焯倫股份有限公司

FILE NO.

DRAWING BY

.X ± 0.2

.XX ± 0.1

.XXX ±
AWG

AREA

REVISIONS

HK

DATE

UNIT / mm

SCALE 1:1

PROJECTION

