


**PIN ASSIGNMENT:**

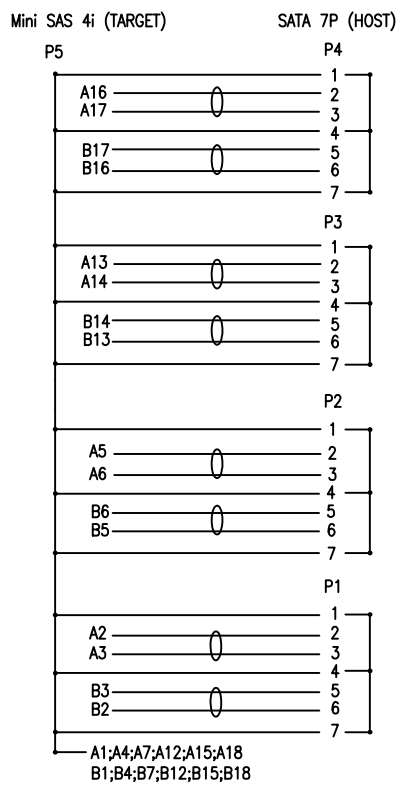

Mini SAS 4i (TARGET)  
P5

SATA 7P (HOST)

- ELECTRICAL CHARACTER:**
- a. 100% OPEN&SHORT TESTING
  - b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec
  - c. INSULATION RESISTANCE:10M Ohm(Min)
  - d. CONDUCTIVE RESISTANCE:5 Ohm(Max).

9	LABEL	LABEL P1 P2 P3 P4	
8	PVC	PVC 45Pa BLACK UL94V-0	
7	CONN 2	SATA 7P RECEPTACLE BLACK CONTACT: G/F	
6	TUBE	WOVEN SLEEVING TUBE BLACK	
5	H.S.T	HEAT SHRINK TUBE BLACK ID: 9.5mm	
4	INNERMOLD	PE LOW DESNIGE	
3	OVERMOLD	PBT BLACK	
2	CONN 1	MINI SAS 4i PLUG CONTACT: G/F W/LATCH W/PCB	
1	CABLE 1	(28AWG*2C+2D)*AL.MYLAR+MYLAR W/O JACKET ARGENT	
NO.	PART NAME	SPEC DESCRIPTION	REMAKE

**RoHS Compliant**



PART NO. M55SASX14-3607-E60C

DWG NO. M55SASX14-3607-E60C

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

FILE NO.

DRAWING BY

.X ± 0.2  
.XX ±  
.XXX ±  
AWG

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

AREA	REVISIONS	HK	DATE
------	-----------	----	------