
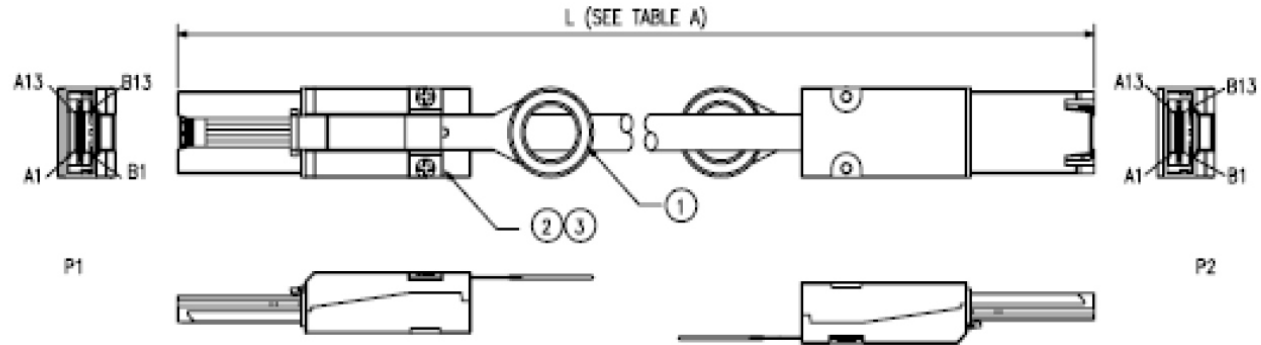


PIN ASSIGNMENT:

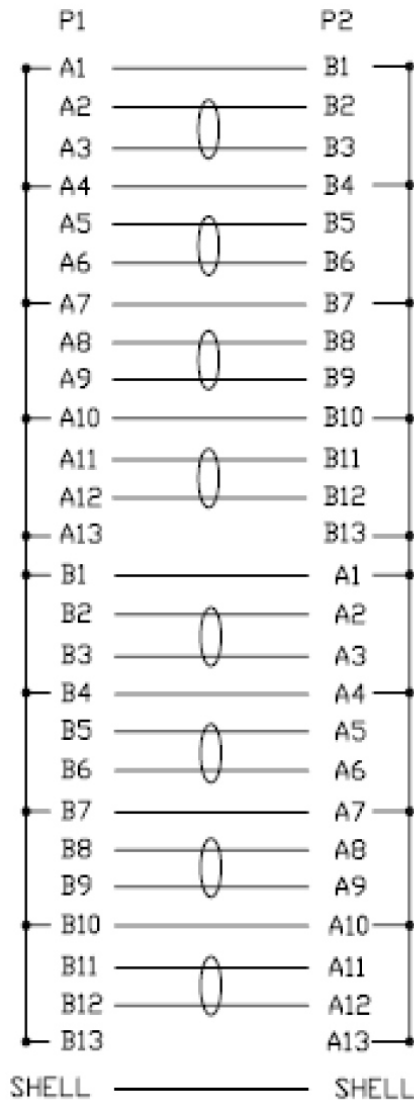

NOTE:

. MATERIAL DESCRIPTION:

1. CABLE:UL20276 (2C+D+AL+ML)*8C+ ML+AB+P OD:7.6mm BLACK
2. MINI SAS 4X PLUG CONNECTOR SHELL:PLATE NI W/BUE HAUL RING
3. PE LOW DESNIGE

. ELECTRICAL CHARACTER:

- a. 100% OPEN&SHORT TESTING;
- b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
- c. INSULATION RESISTANCE:10M Ohm(Min);
- d. CONDUCTIVE RESISTANCE:2 Ohm(Max).

MSSX2-2626-MxM-LF
LEADFREE

RoHS Compliant



PART NO. MSSX2- 2626-MxM

DWG NO. MSSX2- 2626-MxM

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

FILE NO.

DRAWING BY

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

