
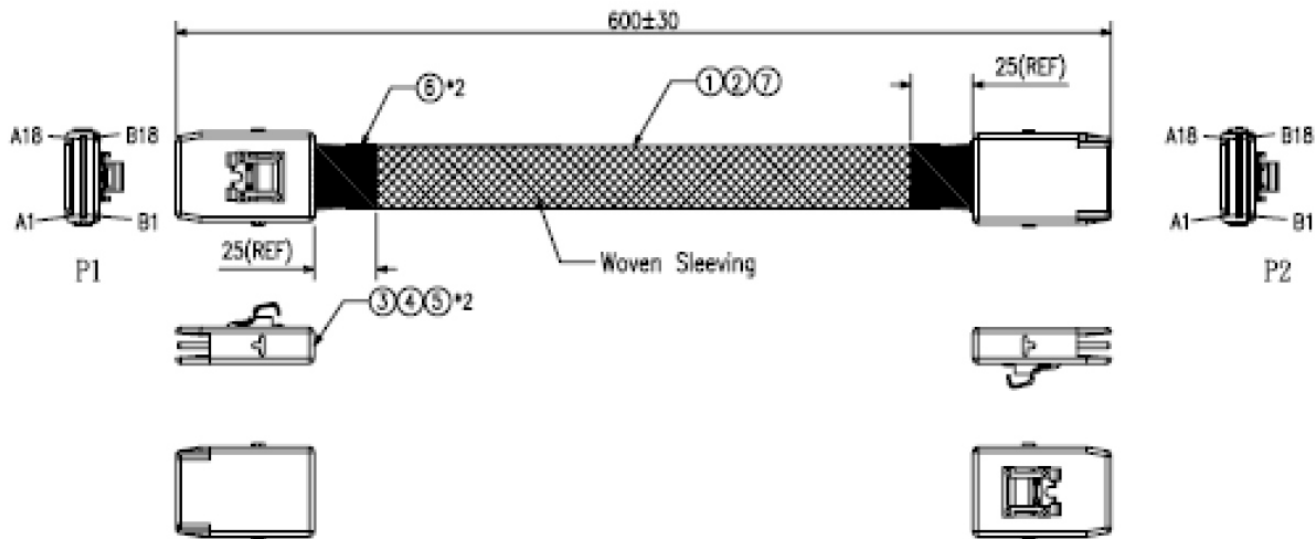


PIN ASSIGNMENT:

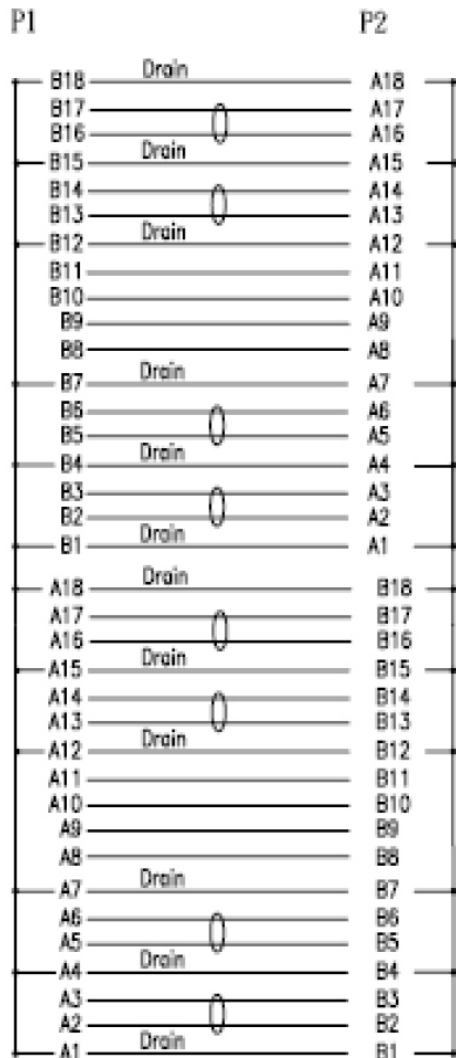

MSSX2-3636-M60C-LF  
LEADFREE

RoHS Compliant

ELECTRICAL CHARACTER:

- a. 100% OPEN&SHORT TESTING
- b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec
- c. INSULATION RESISTANCE:10M Ohm(Min)
- d. CONDUCTIVE RESISTANCE:5 Ohm(Max).

7	TUBE	WOVEN SLEEVEING TUBE BLACK	
6	H.S.T	HEAT SHRINK TUBE BLACK ID: 9.5mm	
5	PE	PE LOW DESNGIE	
4	PVC	PVC 25Pa BLACK UL94V-0	
3	CONN	MINI SAS 4I PLUG CONNECTOR W/LATCH W/PCB	
2	CABLE 2	FLAT CABLE UL2651 28AWG PITCH:1.0 GRAY	
1	CABLE 1	(28AWG*2C+2D)*ALMYLAR+MYLAR W/O JACKET	
NO.	PART NAME	SPEC DESCRIPTION	REMAKE



PART NO. MSSX2-3636-M60C

DWG NO. MSSX2-3636-M60C

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

- .X ± 0.2
- .XX ± 0.1
- .XXX ±
- AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司