


- 2 ~ 24 circuits available
- Material: UL 94V-0 nylon
- Color: White

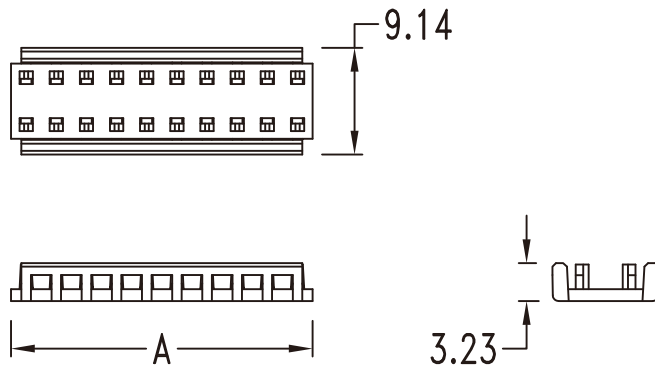

Dimensional Information - in (mm)

Circuits	Dim. A	Circuits	Dim. A	Circuits	Dim. A	Circuits	Dim. A	Circuits	Dim. A
2	5.08±0.05	7	17.78±0.15	12	30.48±0.20	17	43.18±0.25	22	55.88±0.30
3	7.62±0.10	8	20.32±0.15	13	33.02±0.20	18	45.72±0.25	23	58.42±0.30
4	10.16±0.10	9	22.86±0.15	14	35.56±0.20	19	48.26±0.25	24	60.96±0.35
5	12.70±0.10	10	25.40±0.15	15	38.10±0.20	20	50.80±0.30		
6	15.24±0.10	11	27.94±0.15	16	40.64±0.25	21	53.34±0.30		

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MT-CC-xx-LF
SERIES | LEADFREE
02~24WAY
FEED THROUGH
COVERH

DESCRIPTION: