


Features:

- Terminal material: Tin-plated phosphor bronze
- Wire range: AWG #24 (Flat ribbon wire)
- With Polarizing Tabs
- Feed-Thru type
- Color: Red

Specification:

- Current rating: 3A AC, DC
- Voltage rating: 250V AC Max
- Contact resistance: Initial value/10mΩ Max.
After environmental testing/20mΩ Max.
- Insulation resistance: 1000MΩ Min.
- Dielectric strength: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C
(Including temperature rise)

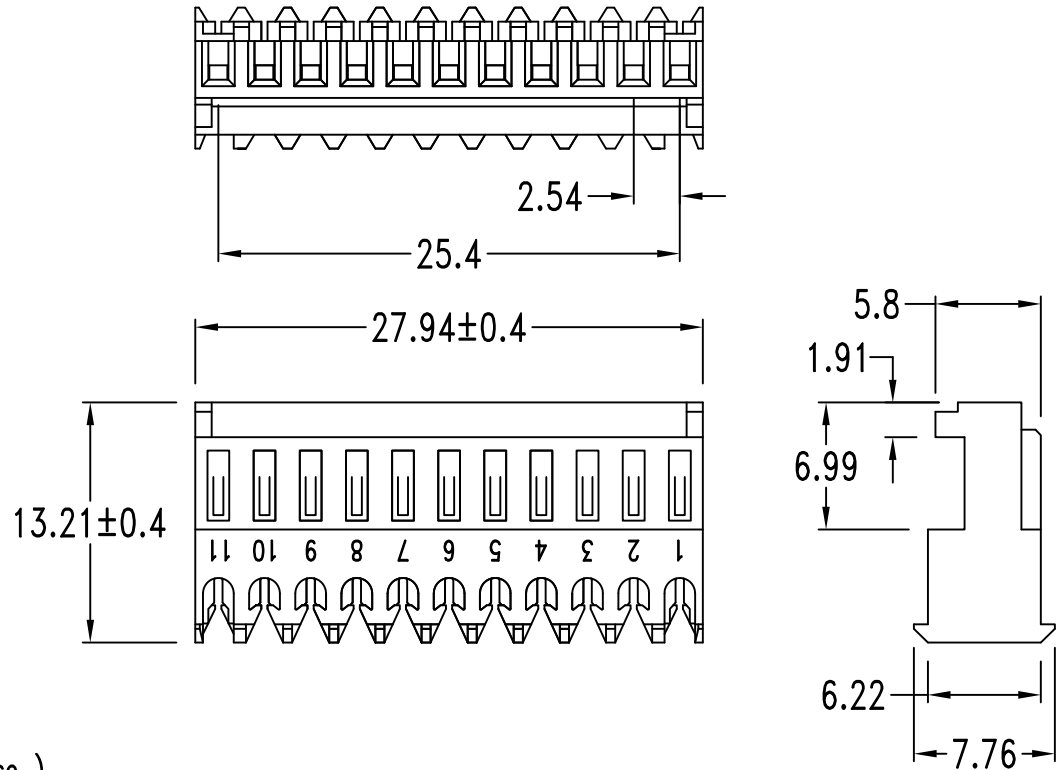

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.40

UNIT / mm

SCALE 1 : 1

.XX ± 0.25

.XXX ± 0.08

ANG ±

煜倫股份有限公司

DATE

SIZE A4

P PROJECTION

照片框

ORDER INFORMATION

MT-HC24TRD-11-LF
 SERIES | | | | | LEADFREE
 HOUSING | | | | | 11WAY
 | | | | | RED
 | | | | | TAB
 | | | | | 24AWG
 | | | | | FEED THROUGH

DESCRIPTION: .100"(2.54mm) IDC Connector

www.morethanall.com