
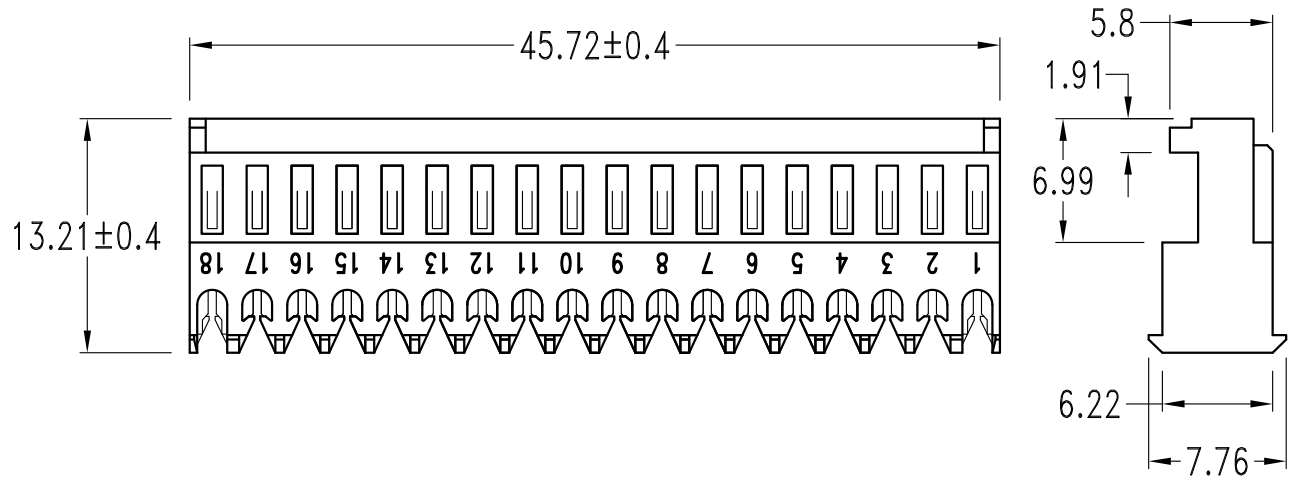


### Features:

- Terminal material: Tin-plated phosphor bronze
- With Polarizing Tabs
- Feed-Thru type
- Wire range: AWG #24 ( Flat ribbon wire )
- Color: Red

### Specification:

- Current rating: 3A AC, DC
- Voltage rating: 250V AC Max
- Contact resistance: Initial value/10mΩ Max.  
After environmental testing/20mΩ Max.
- Insulation resistance: 1000MΩ Min.
- Dielectric strength: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C  
( Including temperature rise )

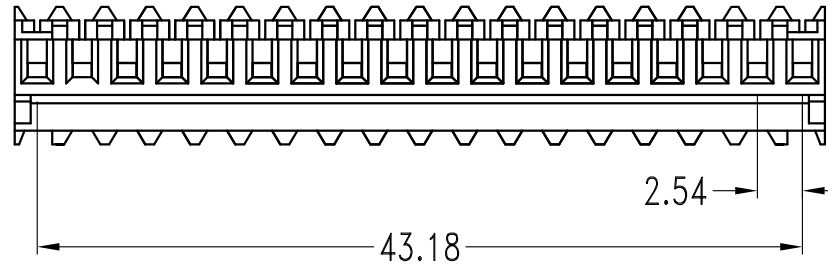

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.40

UNIT / mm

SCALE 1 : 1

.XX ± 0.25

.XXX ± 0.08

DATE

ANG ±

照片框

ORDER INFORMATION

MT-HC24TRD-18-LF  
SERIES | HOUSING | TAB | FEED THROUGH  
RED | 24AWG | 18WAY | LEADFREE

煜倫股份有限公司

www.morethanall.com

SIZE A4

PJECTION

DESCRIPTION: .100\*(2.54mm) IDC Connector