


Features:

- Housing material: UL 94V-2 nylon 66
- Terminal material: Tin-plated phosphor bronze
- Wire range: AWG #26 (Flat ribbon wire)
- Without Polarizing Tabs
- With Locking Ramp
- Feed-Thru type
- Plastic color: Blue

Specification:

- Current rating: 3A AC, DC
- Voltage rating: 250V AC Max.
- Contact resistance: Initial value 10mΩ Max.
After environmental testing/ Twice of Initial.
- Insulation resistance: 1000MΩ Min.
- Dielectric strength: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C
(Including temperature rise)

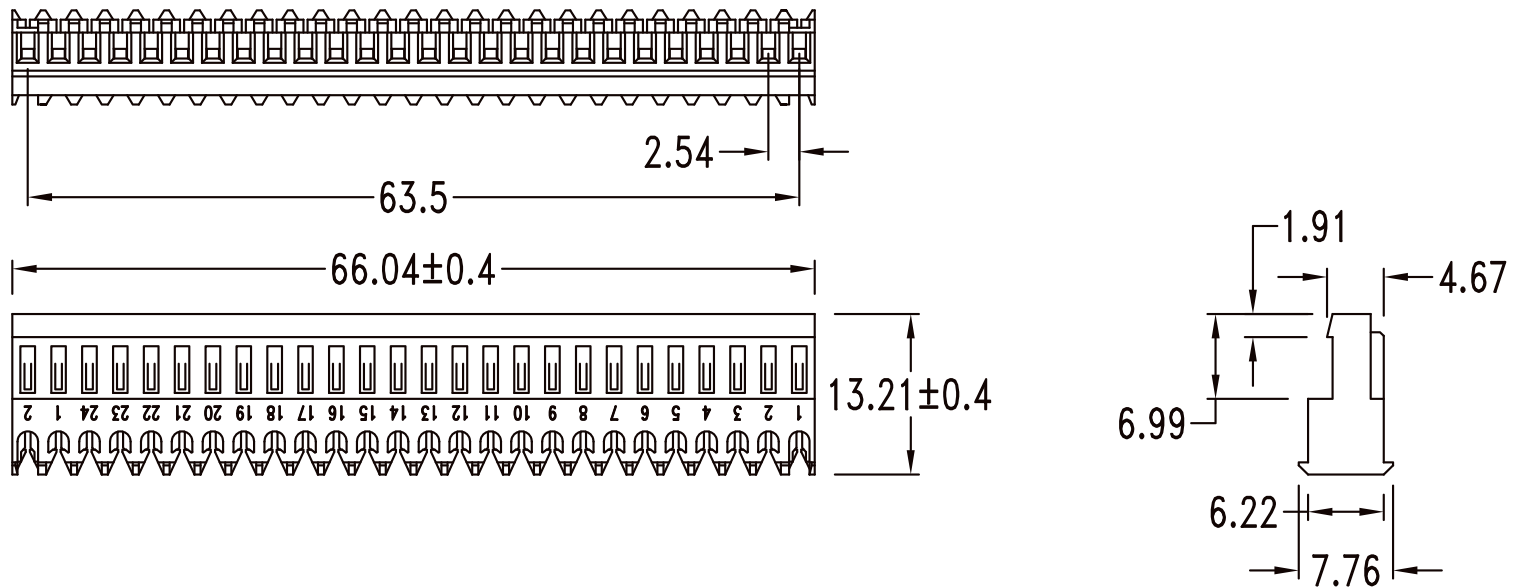

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.40

.XX ± 0.25

.XXX ± 0.08


ANG ±

P PROJECTION

照片框

ORDER INFORMATION

MT-HC26-26-LF

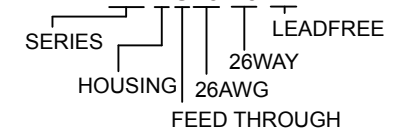

DESCRIPTION: .100"(2.54mm) IDC Connector