


Features:

- 2 ~ 24 circuits available
- Housing material: UL 94V-2 nylon 66 or V-0
- Terminal material: Tin-plated phosphor bronze
- With or without Polarizing Tabs
- With Locking Ramp
- Feed-Thru and Closed End type
- Wire range: AWG #22 ~ #28 (Flat ribbonwire)

Specification:

- Current rating: 3A AC, DC
- Voltage rating: 250V AC Max
- Contact resistance: Initial value/10mΩ Max.
After environmental testing/20mΩ Max.
- Insulation resistance: 1000MΩ Min.
- Dielectric strength: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C
(Including temperature rise)

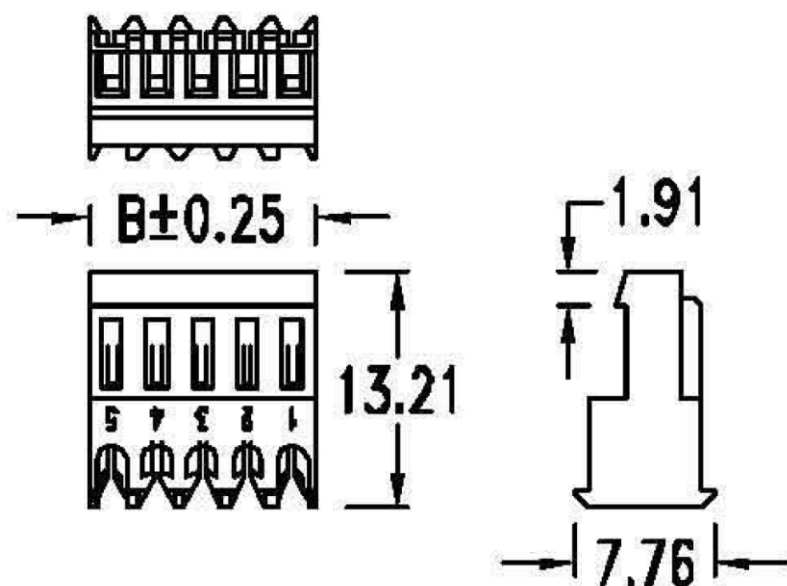

Dimensional Information (mm)

Circuits	Dim. A	Dim. B
xx	2.54 x (xx - 1)	2.54 x (xx)

Note: xx = Number of circuits, 02 ~ 24

C	Color	Wire size
2	Red	#22
9	White	#24
6	Blue	#26
5	Green	#28

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

PJECTION

照片框

ORDER INFORMATION

MT-HCxx-xx-LF
SERIES | LEADFREE
02-24WAY
22-28AWG
FEED THROUGH
HOUSING

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: