
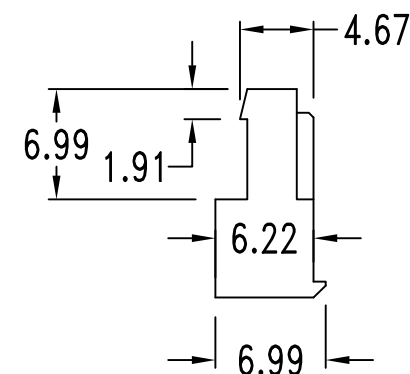
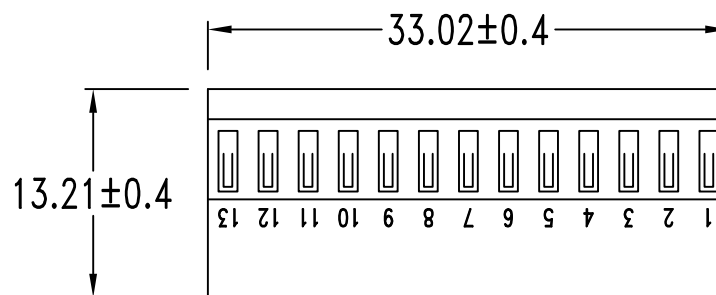


Features:

- Housing material: UL 94V-2 nylon 66
- Terminal material: Tin-plated phosphor bronze
- Wire range: AWG #28 (Flat ribbon wire)
- Without polarizing tabs
- Closed end type
- Color: Green

Specification:

- Current rating: 3A AC, DC
- Voltage rating: 250V AC Max.
- Contact resistance: Initial value 30mΩ Max.
After environmental testing / Twice of Initial.
- Insulation resistance: 1000MΩ Min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C
(Including temperature rise)

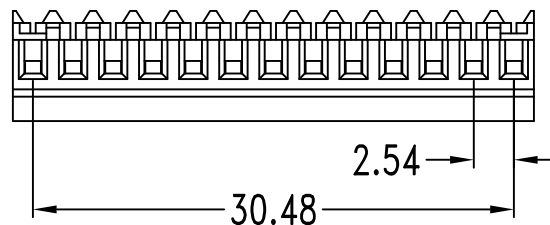

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

MT-HL28-13-LF
SERIES | 28 AWG | 13 WAY | LEADFREE
CLOSED END
HOUSING

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: