


- Closed End type
- Without Polarizing Tabs

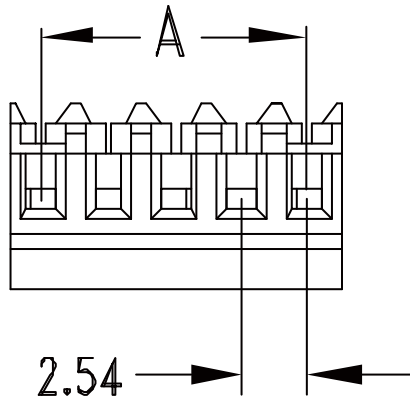


Features:

- 2 ~ 24 circuits available
- Housing material: UL 94V-2 nylon 66
- Terminal material: Phosphor bronze
- △3 • Finished: Tin-plated 100u" over nickel 30u"
- With or without Polarizing Tabs
- With Locking Ramp
- Feed-Thru and Closed End type
- Wire range: AWG #22 ~ #28 (Flat ribbon wire)

Specification:

- Current rating: 3A AC, DC
- Voltage rating: 250V AC Max.
- △2 • Contact resistance: Initial value/See table 1. After environmental testing/Twice of Initial.
- Insulation resistance: 1000MΩ Min.
- Dielectric strength: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C (Including temperature rise)

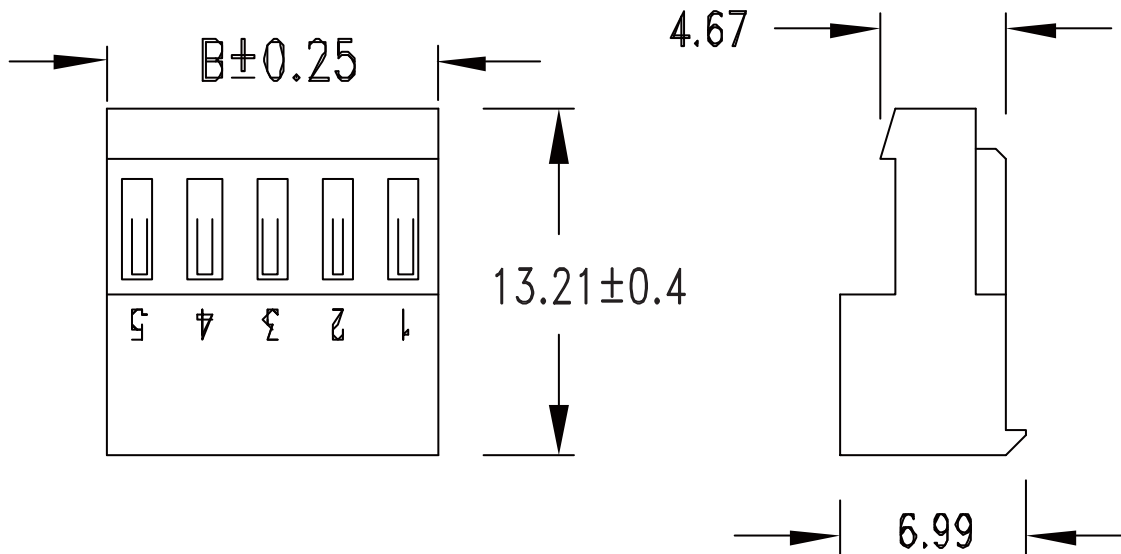

Dimensional Information (mm)

Circuits	Dim. A	Dim. B
xx	2.54 x (xx - 1)	2.54 x (xx)

Note: xx = Number of circuits, 02 ~ 24

Color	Wire size	Contact resistance
Red	#22	10mΩ Max.
White	#24	15mΩ Max.
Blue	#26	20mΩ Max.
Green	#28	30mΩ Max.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PJECTION

X.±
.X±
.XX±
.XXX±
ANG±



ORDER INFORMATION

MT-HLxx-xx-LF
SERIES | | | LEADFREE
| | | 02-24WAY
| | | 22-28AWG
| | | CLOSED END
| | | HOUSING

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: