




- Closed End type
- With Polarizing Tabs

### Features:

- 2 ~ 24 circuits available
- Housing material: UL 94V-2 nylon 66
- Terminal material: Tin-plated phosphor bronze
- With or without Polarizing Tabs
- With Locking Ramp
- Feed-Thru and Closed End type
- Wire range: AWG #22 ~ #28 ( Flat ribbon wire )

### Specification:

- Current rating: 3A AC, DC
- Voltage rating: 250V AC Max
- Contact resistance: Initial value/10mΩ Max.  
After environmental testing/20mΩ Max.
- Insulation resistance: 1000MΩ Min.
- Dielectric strength: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C  
( Including temperature rise )

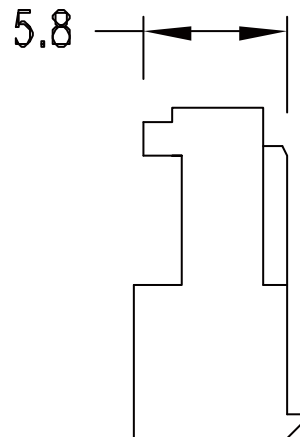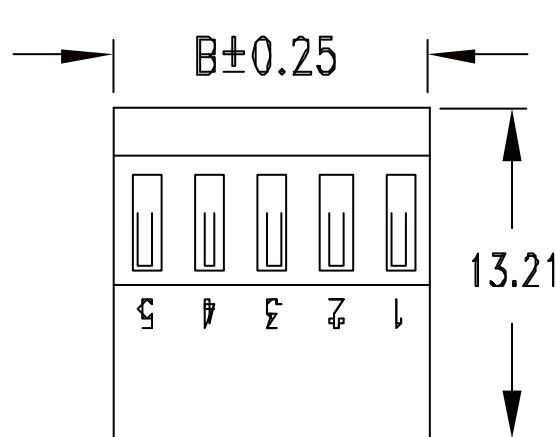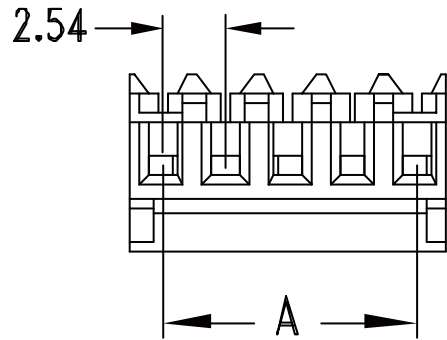

### Dimensional Information ( mm )

Circuits	Dim. A	Dim. B
xx	$2.54 \times ( xx - 1 )$	$2.54 \times ( xx )$

Note: xx = Number of circuits, 02 ~ 24

Color	Wire size	Contact resistance
Red	#22	10mΩ Max.
White	#24	15mΩ Max.
Blue	#26	20mΩ Max.
Green	#28	30mΩ Max.

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE


SIZE A4

PROJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



ORDER INFORMATION

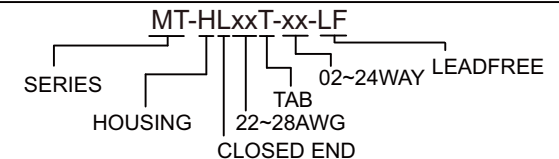

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: