
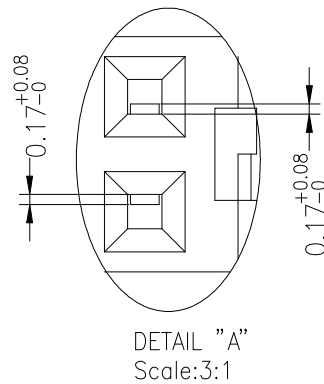

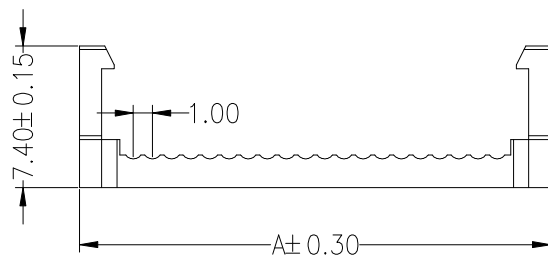
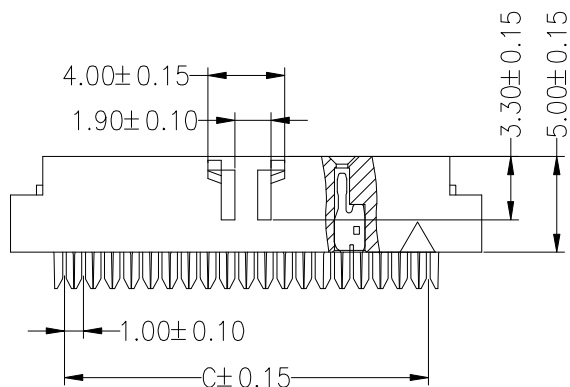


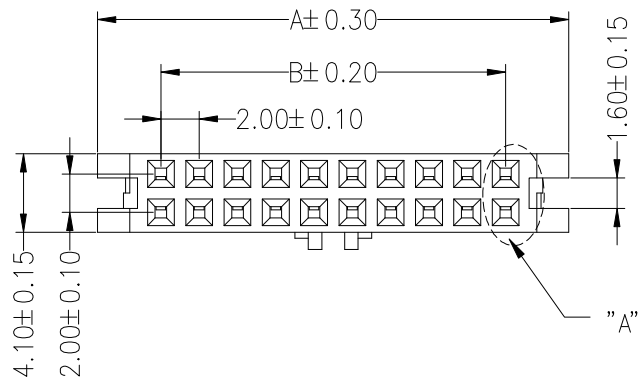

SPECIFICATIONS

Rated Current:1.0AMP

Contact Resistance:20m Ω Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000M Ω Min

Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze

Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PBT

Pin	Dimension mm		
	A	B	C
06	10.60	4.00	5.00
08	12.60	6.00	7.00
10	14.60	8.00	9.00
12	16.60	10.00	11.00
14	18.60	12.00	13.00
16	20.60	14.00	15.00
18	22.60	16.00	17.00
20	24.60	18.00	19.00
24	28.60	22.00	23.00
26	30.60	24.00	25.00
30	34.60	28.00	29.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$ 3°



ORDER INFORMATION

MTK-C2-2Xxx-LF

SERIES

LEADFREE

2X03:06 WAY

2X15:30 WAY

TWO TYPE

DESCRIPTION: 2.00 NPin FC(IDC)