


RECOMMENDED
MOUNTING HOLE
MAX Panel thickness: 3.0mm

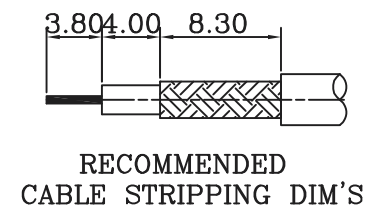

RECOMMENDED
CABLE STRIPPING DIM'S

9	NUT	ZINC	1	NICKEL PLATED
8	LOCK WASHER	IRON	1	NICKEL PLATED
7	FERRULE	BRASS	1	NICKEL PLATED
6	SLEEVE	POM	1	NATURAL
5	CONTACT PIN	BRASS	1	GOLD PLATED
4	REAR BODY	ZINC	1	NICKEL PLATED
3	INSULATOR	POM	1	NATURAL
2	INSULATOR	POM	1	NATURAL
1	BODY	ZINC	1	NICKEL PLATED
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

RoHS Compliant

TOLERANCES ARE
0.5-15 = ±0.15
15-30 = ±0.30
30-120 = ±0.60
>120 = ±1.00

照片框

ORDER INFORMATION

MUHF-JCPANW-316-LF
SERIES | JACK | PANEL FRONT | NUT+WASHER | LEADFREE
Rg316
CRIMP

DESCRIPTION: Mini UHF JACK BULKHEAD FOR RD316U

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE
SIZE A4 PPROJECTION