


MATERIAL:

- HOUSING & COVER—PBT POLYESTER UL94V-0 MIXED GLASS FIBER. STANDARD COLOR—GRAY OR BLACK.
- CONTACTS—0.35mm THICK PHOS-BRONZE PLATED WITH HARD GOLD AND GOLD FLASH IN SOLDER AREA.
- SHIELD—0.20mm THICK COPPER ALLOY, PLATED WITH NICKEL.

USB:

- HOUSING—PBT POLYESTER UL94V-0 MIXED GLASS FIBER. STANDARD COLOR—GRAY.
- CONTACTS—0.25mm THICK PHOS-BRONZE PLATED WITH HARD GOLD AND TIN PLATED IN SOLDER AREA.
- SHIELD—0.30mm THICK SPCC, 80u" MIN. NICKEL PLATED.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68,SUBPART F.

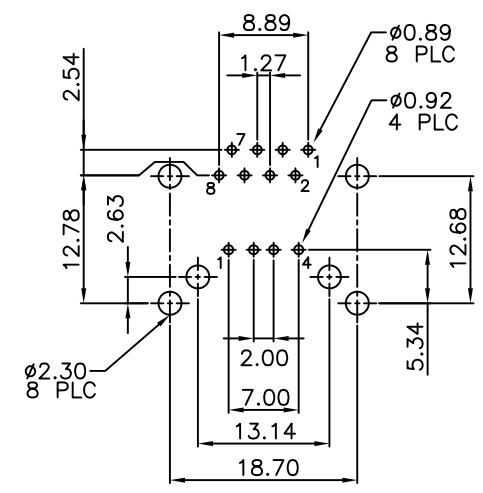

PCB LAYOUT
Ref.



RoHS Compliant		TOLERANCES ARE	
DRAWING BY CY		X, ±	
CHECKED BY GENIUS		.X ± 0.25	
UNIT / mm		.XX ± 0.13	
SCALE 1 : 1		.XXX ± 0.05	
DATE		ANG ±	
SIZE A4	PJECTION		

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

ORDER INFORMATION			
MUJ-KX06-88A1-LF			
SERIES	LEADFREE	A TYPE	
	8P8C	NON EAR	
	06u" GOLD	BLACK	
DESCRIPTION: MODULAR JACK, RJ45 STACKED OVER USB CONN, WITHOUT LED, DIP TYPE			