


MATERIAL:

- HOUSING & COVER—PBT POLYESTER UL94V-0 MIXED GLASS FIBER. STANDARD COLOR—GRAY OR BLACK.
 - CONTACTS—0.35mm THICK PHOS-BRONZE PLATED WITH HARD GOLD AND GOLD FLASH IN SOLDER AREA.
 - SHIELD—0.20mm THICK COPPER ALLOY, PLATED WITH NICKEL.
 - USB:
 - HOUSING—PBT POLYESTER UL94V-0 MIXED GLASS FIBER. STANDARD COLOR—GRAY.
 - CONTACTS—0.25mm THICK PHOS-BRONZE PLATED WITH HARD GOLD AND TIN PLATED IN SOLDER AREA.
 - SHIELD—0.30mm THICK SPCC, 80u" MIN. NICKEL PLATED.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68,SUBPART F.

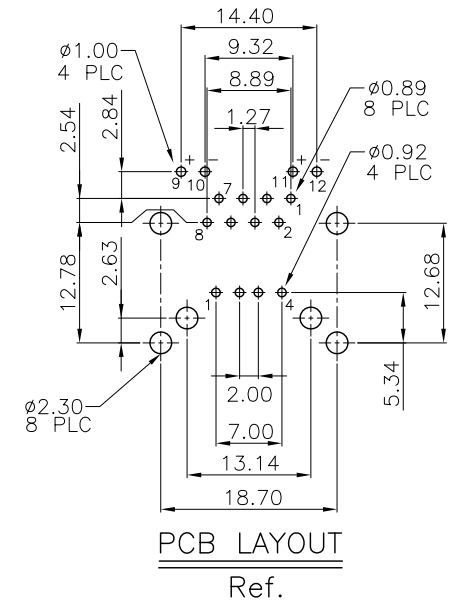

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE

X.±
.X±
.XX±
.XXX±
ANG ±

照片框

ORDER INFORMATION

MUJL-KF06xx-88A1-LF
SERIES | LEADFREE
A TYPE
DIP 90° | GY:GREEN / YELLOW
FULL SPRING | YG:YELLOW / GREEN
06u" GOLD

www.morethanall.com

SIZE A4 PPROJECTION

DESCRIPTION: MODULAR JACK, RJ45 STACKED OVER USB CONN, WITHOUT LED, DIP TYPE