


MATERIAL:

- HOUSING & COVER—PBT POLYESTER UL94V-0 MIXED GLASS FIBER. STANDARD COLOR—GRAY OR BLACK.
- CONTACTS—0.35mm THICK PHOS-BRONZE PLATED WITH HARD GOLD AND GOLD FLASH IN SOLDER AREA.
- SHIELD—0.20mm THICK COPPER ALLOY, PLATED WITH NICKEL.

USB:

- HOUSING—PBT POLYESTER UL94V-0 MIXED GLASS FIBER. STANDARD COLOR—GRAY.
- CONTACTS—0.25mm THICK PHOS-BRONZE PLATED WITH HARD GOLD AND TIN PLATED IN SOLDER AREA.
- SHIELD—0.30mm THICK SPCC, 80u" MIN. NICKEL PLATED.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68,SUBPART F.

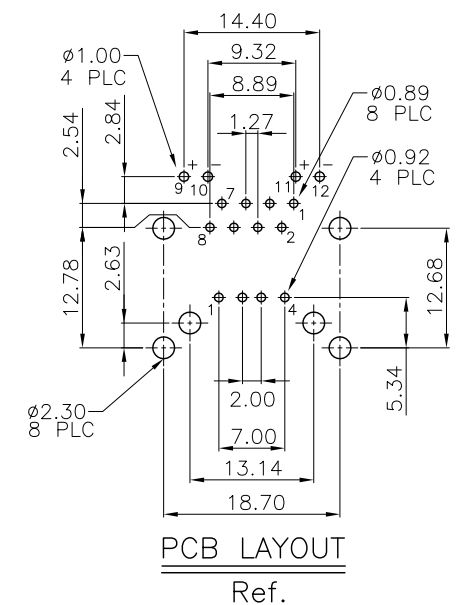

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		X.± .X± .XX± .XXX± ANG±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PJECTION	



ORDER INFORMATION

MUJL-RYG-88A1-LF
SERIES | LEADFREE
8P8C TO A TYPE
YELLOW/GREEN
DIP 90°

DESCRIPTION: MODULAR JACK, RJ45 STACKED OVER USB CONN, WITHOUT LED, DIP TYPE