



一、Mechanical Dimensions

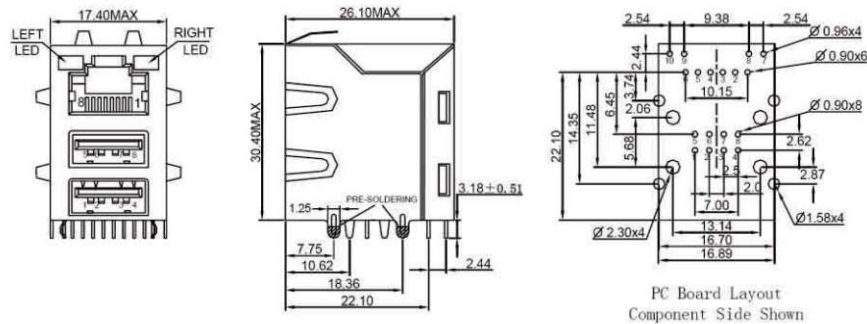

UNIT: mm Unless otherwise specified, all tolerances are ± 0.25

二、Schematics

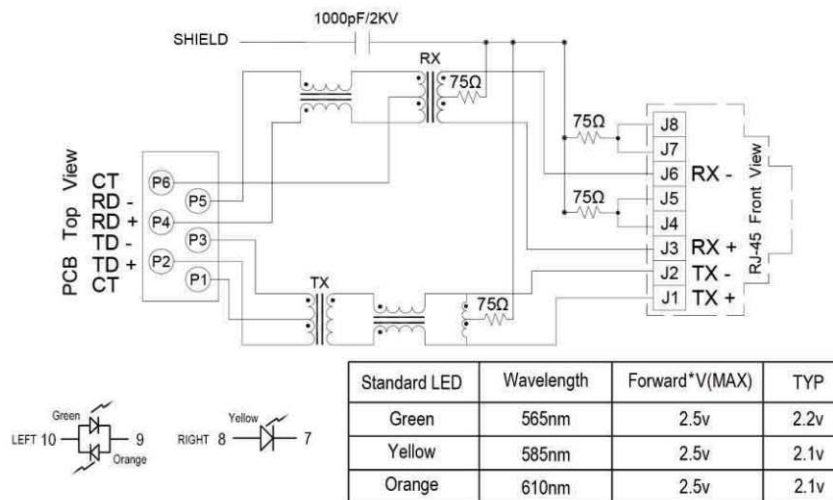

Standard LED	Wavelength	Forward*V(MAX)	TYP
Green	565nm	2.5v	2.2v
Yellow	585nm	2.5v	2.1v
Orange	610nm	2.5v	2.1v

With a forward current of 20mA

三、ELECTRICAL SPECIFICATIONS@25°C:

1. Turn Ratio($\pm 5\%$): TX=1CT:1,RX=1CT:1CT
2. Inductance (100KHz/0.1V@8mA):350uH MIN
3. Insertion Loss (dB MAX): -1.0dB(1-100MHz)
4. Return Loss(dB MIN): -18dB(1-30MHz),-16dB(30-60MHz),-12dB(60-80MHz)
5. Cross talk (dB MIN): -35dB(1-100MHz)
6. CMR(dB MIN): -30dB(1-100MHz)
7. HI-POT(Pri to Sec): 1500Vrms/0.5mA/60sec or 1650Vrms/0.5mA/2sec
8. Operating Temperature:0°C TO +70°C
9. RoHS compliance:YES

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION



ORDER INFORMATION

MUJT16UL-KF06GOYX-86AA

SERIES

8P6C TO AA TYPE

BLACK
FULL SPRING

LEFT / RIGHT
GREEN+ORANGE / YELLOW
06u" GOLD

DESCRIPTION:

四、Mechanicals

Housing Material: PBT

Insert Material:

Insert :PBT UL94V-0

Contact : Copper Alloy ($t=0.3\text{mm}$)

Contact pin Material:

RJ Upper Support : PBT UL 94V-0

Contact : SPCC ($t=0.4\text{mm}$)

Shielding Material:

MATERIAL: BRASS, C2680

USB:

Housing :PBT UL94V-0 Black.

Contact:Copper Alloy ($t=0.25\text{mm}$)


Shell:Copper Alloy ($t=0.30\text{mm}$)

Solder Tail Tin Plated Contact Area 1u" Gold Plated

Environmental


1.Storage Temp:-40℃ TO +85℃.

2.Operating Temp:0℃ TO +70℃

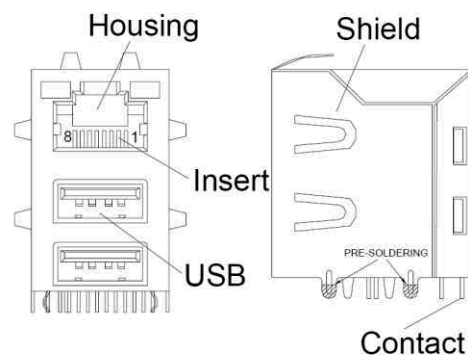


五、Packaging

1. packaging unit : 40 PCS/tray
2. packaging material : PET

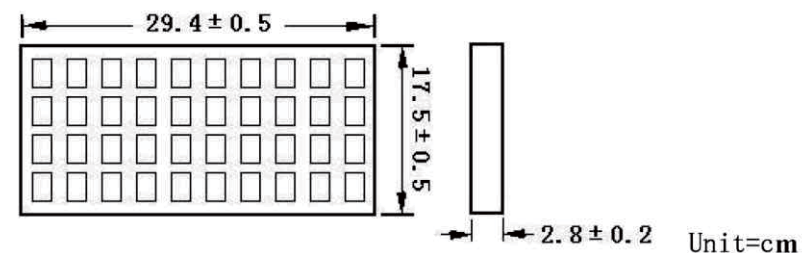

3. outer carton unit: 640 pcs/ 16 Trays/box

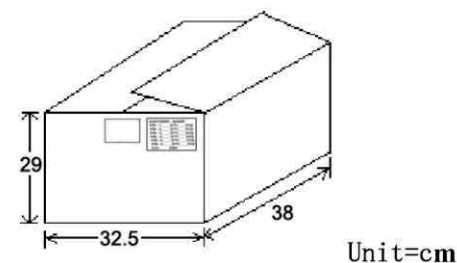

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

MUJT16UL-KF06GOYX-86AA

SERIES

8P6C TO AA TYPE

BLACK
FULL SPRING

LEFT / RIGHT
GREEN+ORANGE / YELLOW
06u" GOLD

DESCRIPTION: