

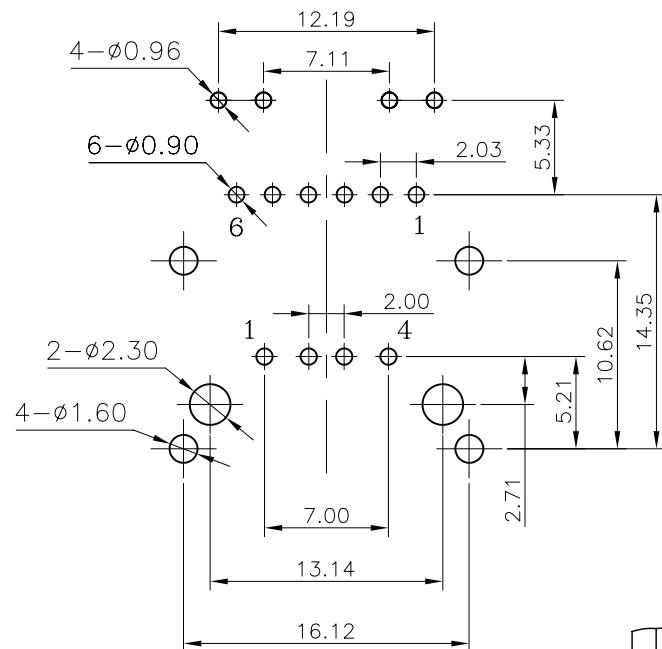
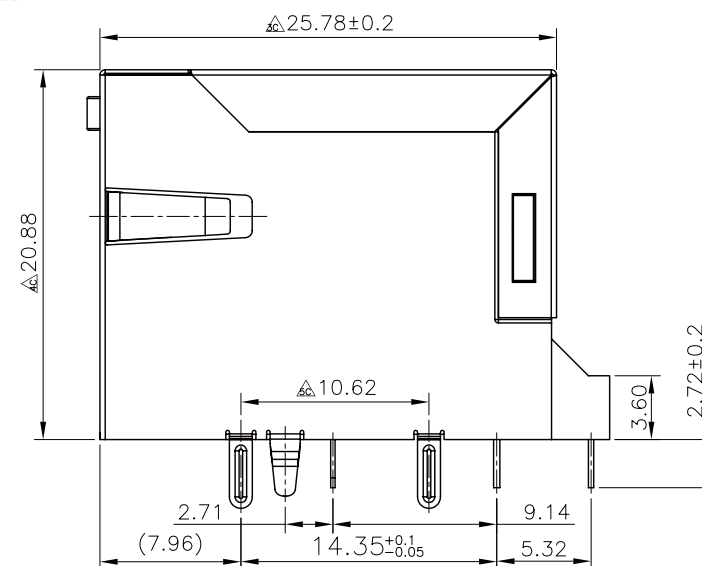
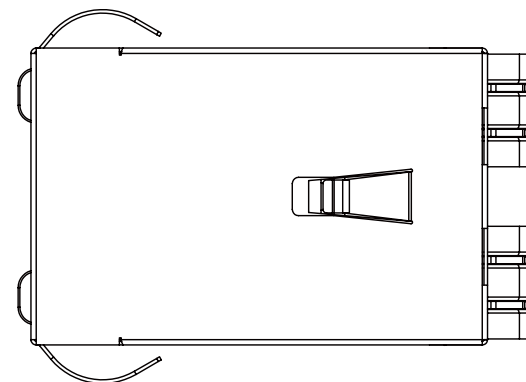


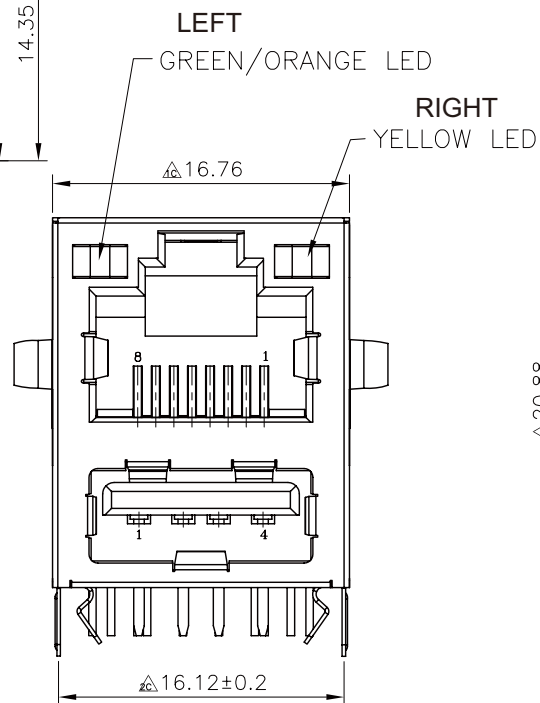

PCB LAYOUT/TOP VIEW

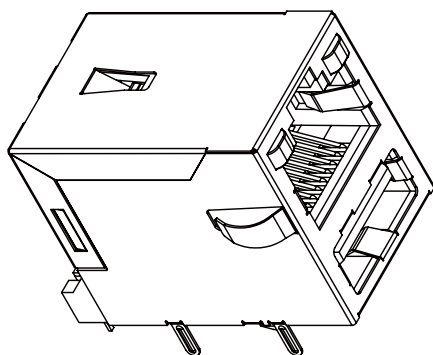

MATERIALS:  
HOUSING:ENGINEERING THERMOPLASTIC  
FLAMMABILITY RATING UL 94V-0.  
CONTACTS:PHOSPHOR BRONZE  
PLATING:GOLD PLATING OVER NICKEL IN CONTACT  
COLOR: BLACK

※凡標註△記號者, 為品管檢驗之尺寸

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



ORDER INFORMATION

MUJT16UL-KS06GOYX-86A1

SERIES

BLACK

SPRING


8P6C TO A TYPE

LEFT / RIGHT

GREEN+ORANGE / YELLOW

06u" GOLD

DESCRIPTION:

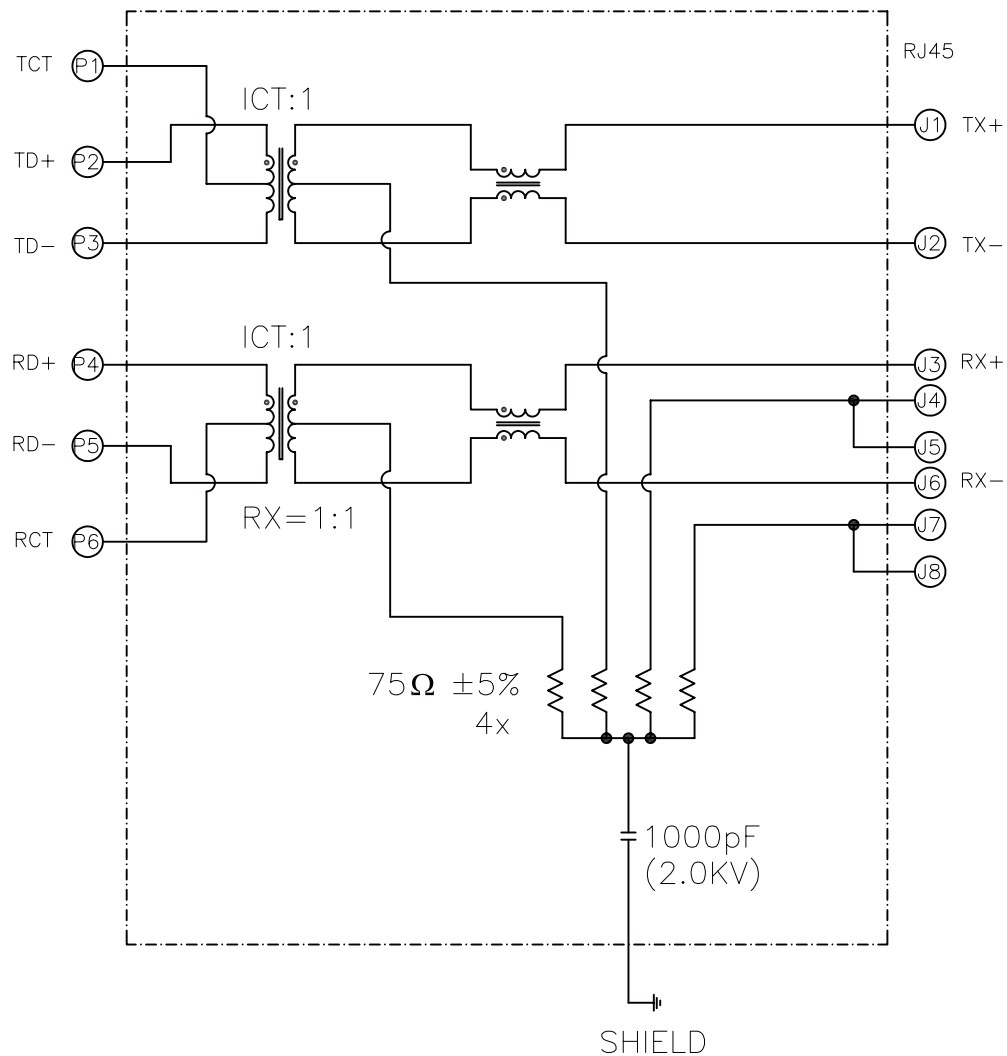

## ELECTRICAL CHARACTERISTICS @ 25° C

### TURNS RATIO

TX ICT: 1  
RX ICT: 1

OCL @100KHz/100mVRMS

8mA DC BLAS 350uH MIN

INS. LOSS

1MHz TO 100MHz -1.0dB MAX

RET.LOSS(MIN)

1MHz-30MHz -18dB

30MHz-60MHz -18+20LOG(F/30MHz)dB

60MHz-80MHz -12dB

CROSS TALK (TX - RX)

500KHz-100MHz -35dB MIN

CM TO CM REJ

100KHz-100MHz -30dB MIN

CM TO DM REJ

100KHz-100MHz -40dB MIN

HIPOT (Isolation voltage): 1500Vums

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



### ORDER INFORMATION

MUJT16UL-KS06GOYX-86A1

SERIES

BLACK

SPRING

8P6C TO A TYPE

LEFT

06u" GOLD

/ RIGHT

DESCRIPTION: