


Features:

- 2 ~ 20 circuits available
- UL 94V-0 nylon 66
- Tin-plated brass pin
- .027"(0.7mm) round pin
- Polarized
- Friction lock

Specification:

- Current rating: 3A Max.
- Voltage rating: 250V
- Dielectric withstanding voltage: 1000V AC/minute
- Contact resistance: 20mΩ Max.
- Ambient temperature range: -40°C ~ 105°C

Dimensional Information (mm)

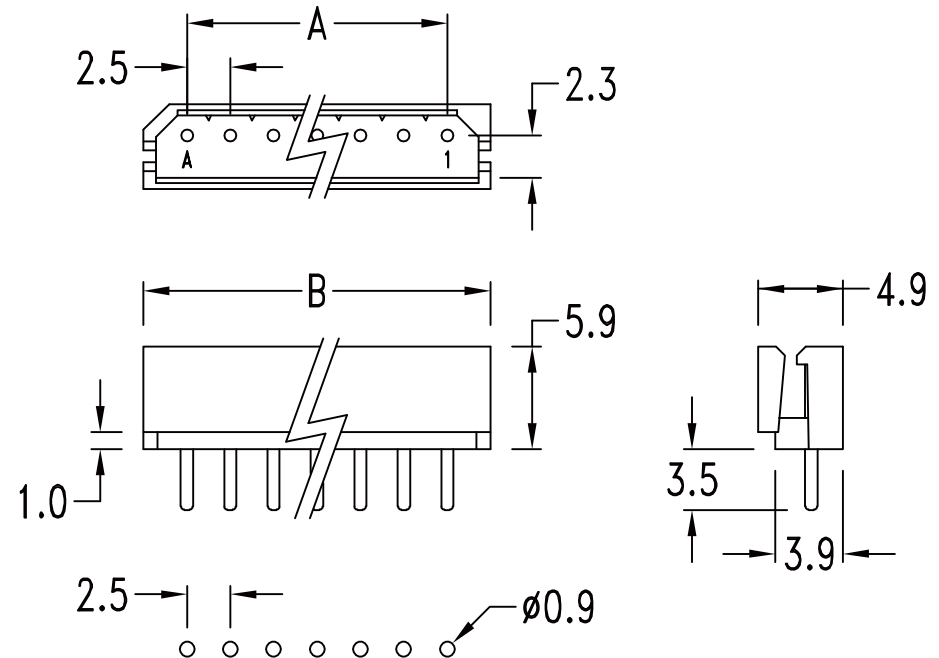

P. C. board hole dimensions

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	2.5	7.5	6	12.5	17.5	10	22.5	27.5	14	32.5	37.5	18	42.5	47.5
3	5.0	10.0	7	15.0	20.0	11	25.0	30.0	15	35.0	40.0	19	45.0	50.0
4	7.5	12.5	8	17.5	22.5	12	27.5	32.5	16	37.5	42.5	20	47.5	52.5
5	10.0	15.0	9	20.0	25.0	13	30.0	35.0	17	40.0	45.0			

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

MW-D-xx-LF
SERIES LEADFREE
02~20WAY
DIP 180°

DESCRIPTION: .098"(2.5mm) Straight Pin Fully Shrouded Headers