
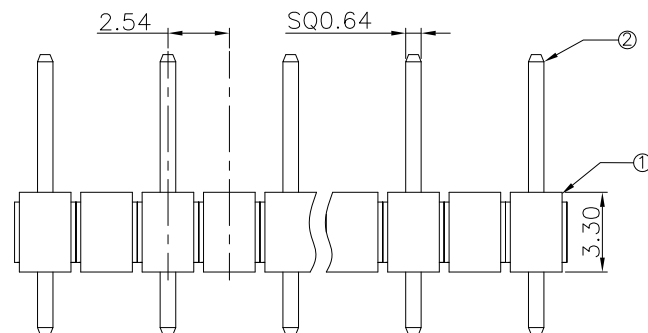
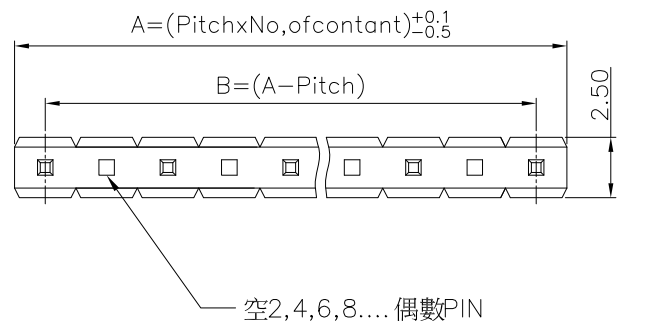


L=11.6mm

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 2.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
Temperature Rating : -40°C ~ +125°C . Dielectric Withstanding Voltage : 500V AC/Min				



P.C.B LAYOUT

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ± 5°

PPOJECTION

ORDER INFORMATION

MX-D116053030BKG-xxEE-LF
 SERIES TOTAL 11.6mm CONTACT 5.3mm DIP 180°
 DIP 3.0mm
 LEADFREE
 EMPTY EVEN PIN
 02~20 WAY
 GOLD
 BLACK

DESCRIPTION: 2.54mm Pin Header Straight Single Row