
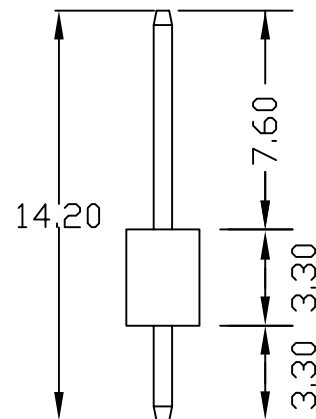
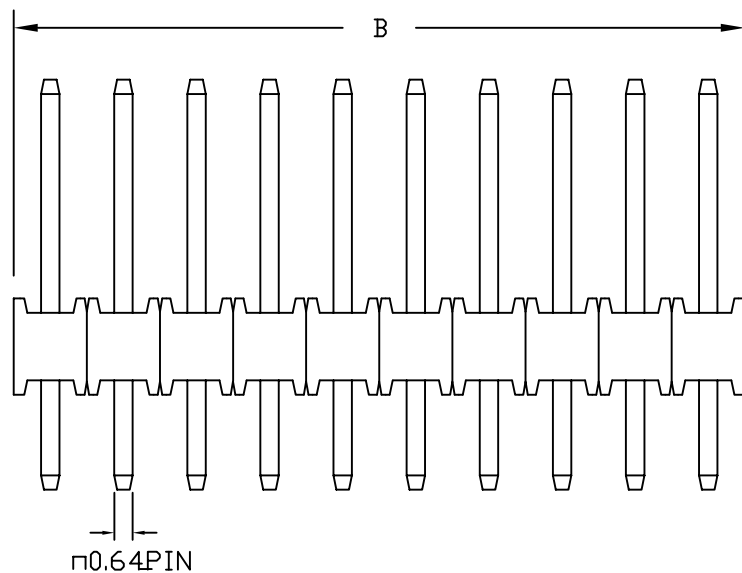
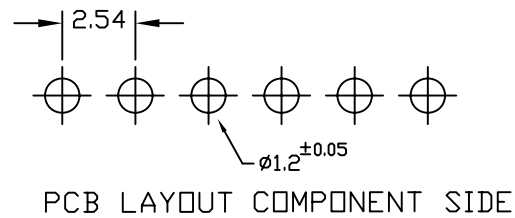


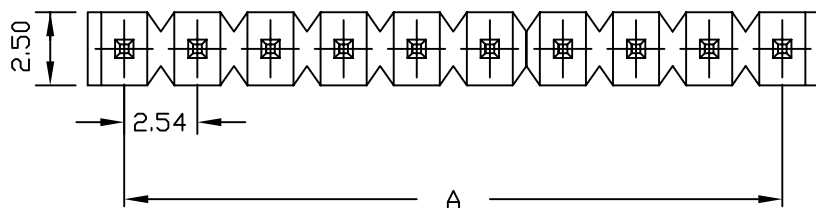

## SPECIFICATIONS

Pitch: 2.54mm  
 Current rating : 3A AC,DC  
 Voltage rating : 250V AC,DC  
 Temperature range:-25°C ~+85°C  
 Insulation resistance : 1000M  
 Withstanding voltage : 1000V ac

| Poles | Dimension |       |
|-------|-----------|-------|
|       | A         | B     |
| 2     | 2.54      | 5.08  |
| 3     | 5.08      | 7.62  |
| 4     | 7.62      | 10.16 |
| 5     | 10.16     | 12.70 |
| 6     | 12.70     | 15.24 |
| 7     | 15.24     | 17.78 |
| 8     | 17.78     | 20.32 |
| 9     | 20.32     | 22.86 |
| 10    | 22.86     | 25.40 |
| 11    | 25.40     | 27.94 |
| 12    | 27.94     | 30.48 |
| 13    | 30.48     | 33.02 |
| 14    | 33.02     | 35.56 |
| 15    | 35.56     | 38.10 |
| 16    | 38.10     | 40.64 |
| 17    | 40.64     | 43.18 |
| 18    | 43.18     | 45.72 |
| 19    | 45.72     | 48.26 |
| 20    | 48.26     | 50.80 |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X,  $\pm$   
 .X  $\pm$  0.30  
 .XX  $\pm$  0.20  
 .XXX  $\pm$  0.10  
 ANG  $\pm$

P PROJECTION

照片框

## ORDER INFORMATION

MX-D142076033-xx-LF

SERIES  
 LEADFREE  
 02-20 WAY  
 DIP 3.3mm  
 CONTACT 7.6mm  
 TOTAL 14.2mm  
 DIP 180°

DESCRIPTION: