
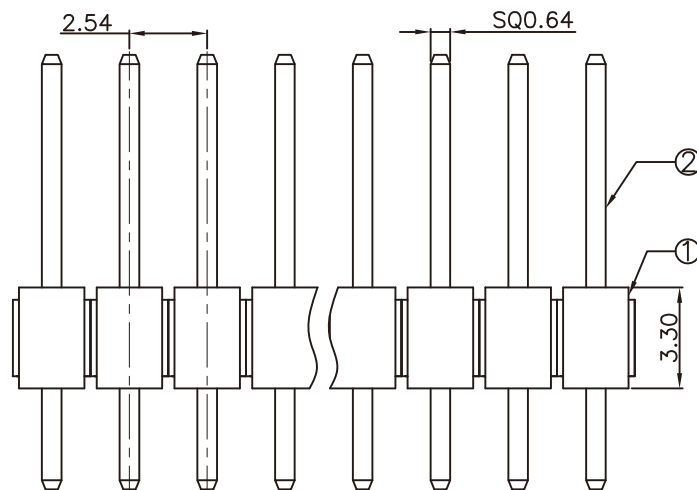
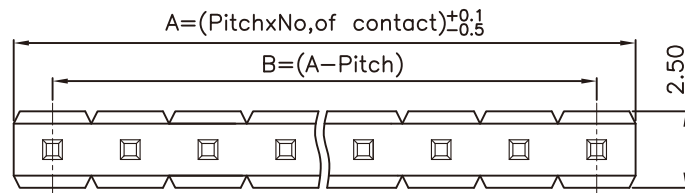


LTR	Part Name	Material	Description	QTY
1	Base	NY-6T UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass C2680	Current Rating : 3.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
Temperature Rating : -40°C ~ +125°C . Dielectric Withstanding Voltage : 1000V AC/Min				

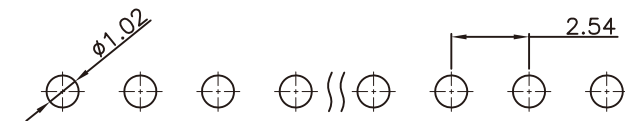

P.C.B LAYOUT

L=14.2mm

RoHS compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

MX-D142076033BKG-xx-LF
SERIES | DIP 180° | TOTAL 14.2mm | CONTACT 7.6mm
LEADFREE 02~20 WAY
GOLD
BLACK
DIP 3.3mm

DESCRIPTION: