
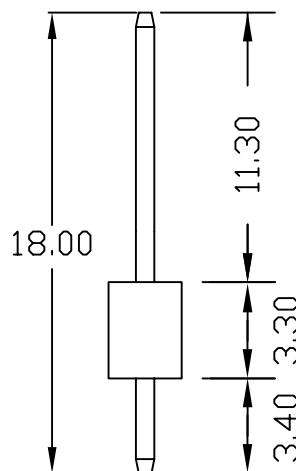


PCB LAYOUT COMPONENT SIDE

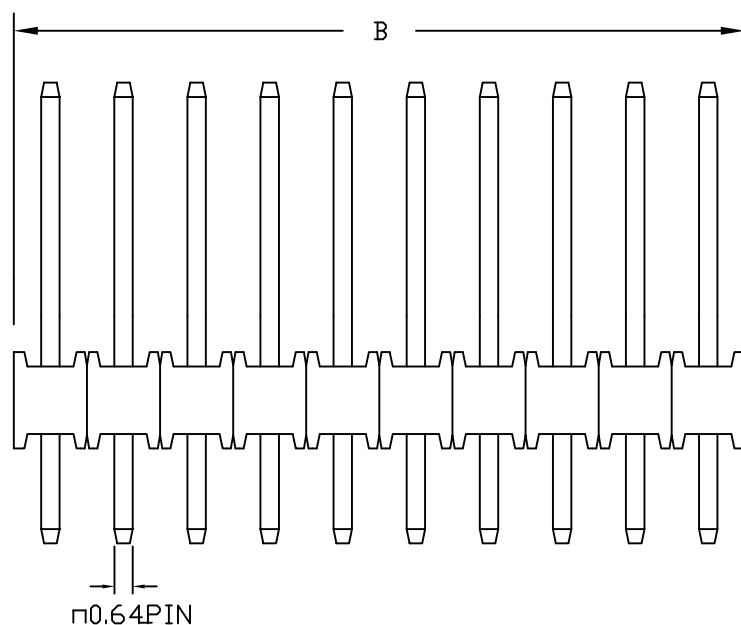

SPECIFICATIONS

Pitch: 2.54mm
 Current rating : 3A AC,DC
 Voltage rating : 250V AC,DC
 Temperature range:-25 C ~+85 C
 Insulation resistance : 1000M
 Withstanding voltage : 1000V ac

Poles	Dimension	
	A	B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION



ORDER INFORMATION

MX-D180113034-xx-LF
 SERIES | | | | LEADFREE
 | | | | 02~20 WAY
 | | | | DIP 3.4mm
 | | | | CONTACT 11.3mm
 | | | | TOTAL 18.0mm
 | | | | DIP 180°

DESCRIPTION: