
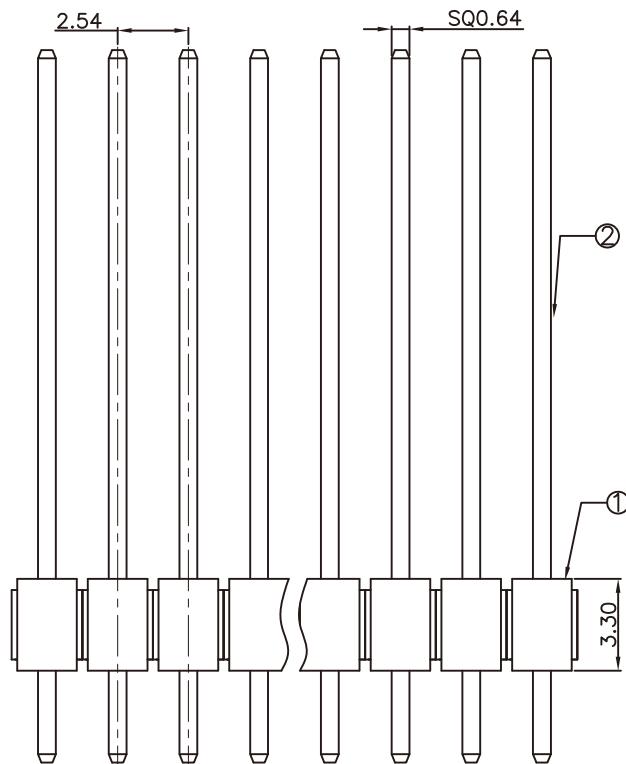


L=25.6mm

LTR	Part Name	Material	Description	QTY
1	Housing	NY-6T UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass C2680	Current Rating : 3.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
Temperature Rating : -40°C ~ +125°C . Dielectric Withstanding Voltage : 1000V AC/Min				

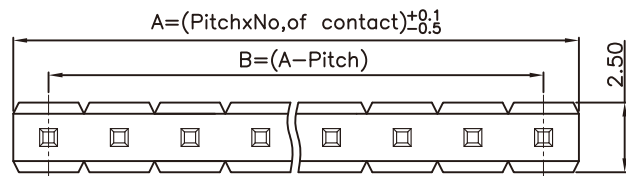

P.C.B LAYOUT

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MX-D256190033-xx-LF
 SERIES | | | | LEADFREE
 | | | | 02~20 WAY
 | | | | DIP 3.3mm
 | | | | CONTACT 19.0mm
 | | | | TOTAL 25.6mm
 | | | | DIP 180°

DESCRIPTION: 2.54mm Pin Header Straight Single Row