


LTR	Part Name	Material	Description	QTY
1	Base	NY-6T UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass C2680	Current Rating : 3.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX

Temperature Rating : -40°C ~ +125°C .
 Dielectric Withstanding Voltage : 1000V AC/Min

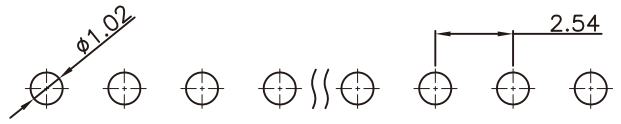

P.C.B LAYOUT

RoHS compliant

MX-DBKN6T-xx-LF
LEADFREE

RoHS Compliant

L=14.2mm

	PART NO. MX-DBKN6T-xx		CHECKED BY CY TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION: AREA REVISIONS HK DATE			
	DWG NO. MX-DBKN6T-xx						
焯倫股份有限公司	FILE NO.		PROJECTION				
	UNIT / mm	SCALE 1:1					