

NOTE:

- SOLDERTAIL TO BE WITHIN 0.05 UPWARD AND 0.2 DOWNWARD FROM Z-DATUM PLACE, AND COPLANALITY OF SOLDERTAILS TO BE WITHIN 0.10. MEASUREMENT POINT IS SOLDERTAILS TIP.
- INSPECTION SYMBOL:  
 ● : MANUFACTURER INSPECTION  
 ◆ : Q.C INSPECTION

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT / mm SCALE 1 : 1  
 DATE  
 SIZE A4 PPROJECTION

TOLERANCES ARE

X. ± 0.30  
 .X ± 0.20  
 .XX ± 0.10  
 .XXX ± 0.05  
 ANG ±


照片框

ORDER INFORMATION

MXM-W075EP2-024206-LF  
 SERIES LEADFREE  
 230 WAY  
 EAR+POST  
 HIGH 7.5mm  
 90°SMT

DESCRIPTION: MXM 230P 0.5 PITCH LEFT KEY



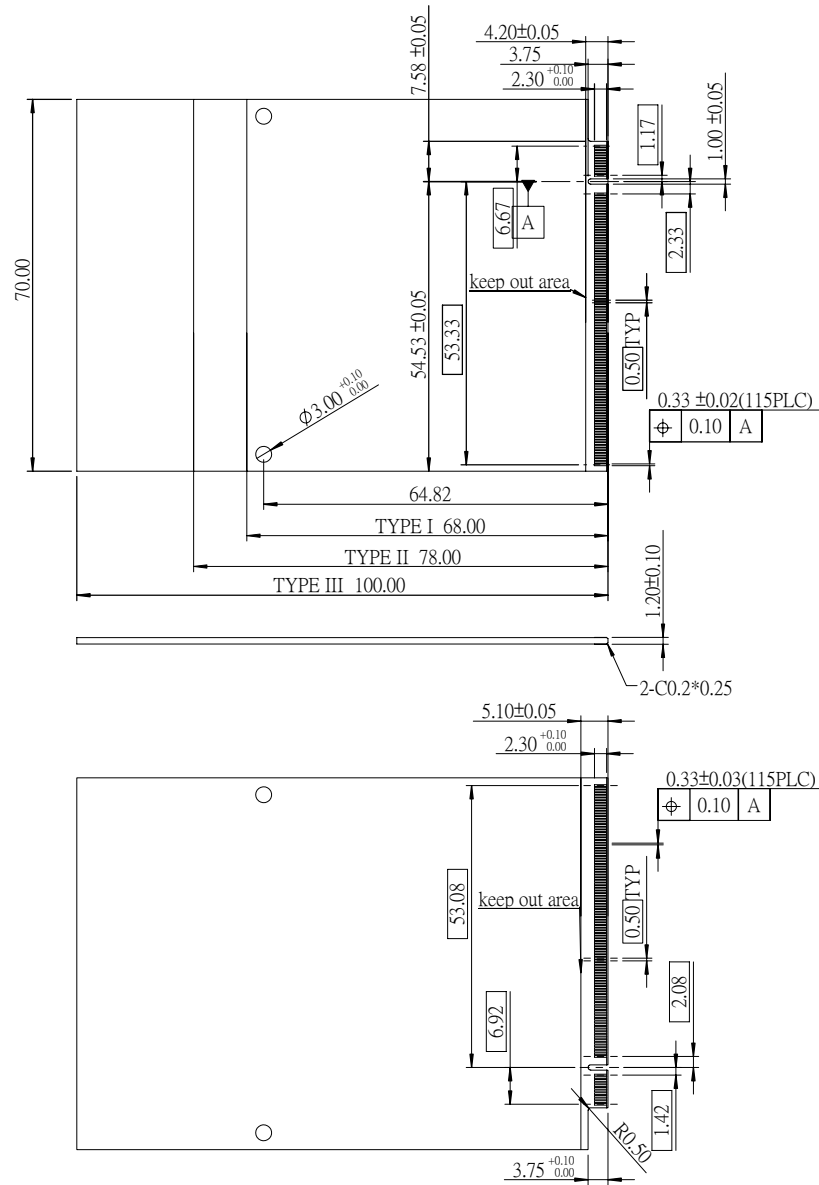

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X ± 0.30

CHECKED BY GENIUS

X ± 0.20

UNIT / mm

SCALE 1 : 1

.XX ± 0.10

DATE

.XXX ± 0.05

ANG ±

照片框

ORDER INFORMATION

MXM-W075EP2-024206-LF

SERIES

LEADFREE

230 WAY

EAR+POST

HIGH 7.5mm

90°SMT

煜倫股份有限公司

www.morethanall.com

SIZE A4

PJECTION

DESCRIPTION: MXM 230P 0.5 PITCH LEFT KEY