


**MATERIALS**

HOUSING: LCP (UL 94V-0)  
 SHELL: STAINLESS STEEL, NICKEL PLATING  
 SOLDER PAD: STAINLESS STEEL, GOLD FLASH  
 TERMINAL: COPPER ALLOY, GOLD PLATING

**SPECIFICATION**

CURRENT RATING: 0.5 AMP MAX  
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 100m OHMS MAX  
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -40°C~+85°C

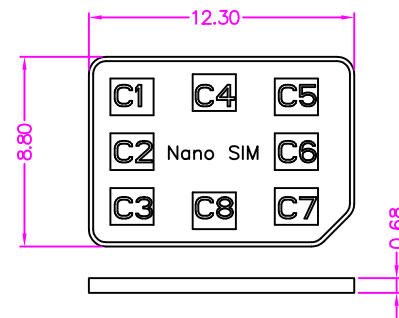

SIM pin Assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O
CD	Detect Switch

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

**煜倫股份有限公司**

www.morethanall.com

DRAWING BY CY		X. ± 0.40
CHECKED BY GENIUS		.X ± 0.30
UNIT / mm	SCALE 1 : 1	.XXX ± 0.20
DATE		.XXX ± 0.10
		ANG ±

SIZE A4 PPROJECTION

照片框

**ORDER INFORMATION**

NASCP-W07PX-06-LF

SERIES | | LEADFREE  
 | | 06WAY  
 | | NON SWITCH  
 | | POST TO POST 7.3mm  
 90°SMT

DESCRIPTION: NANO SIM CARD, 7PIN, PCB MOUNT, SMT, METAL SHIELD, PUSH PUSH TYPE  
 H=1.25mm, FEMALE