
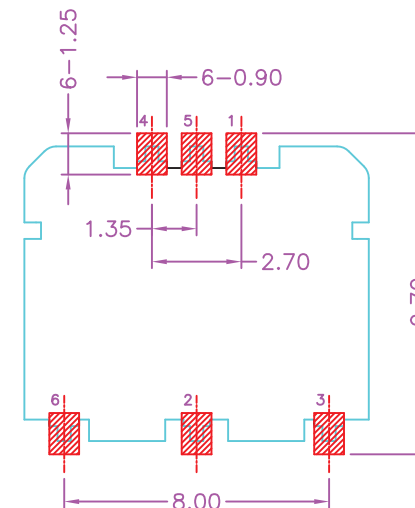
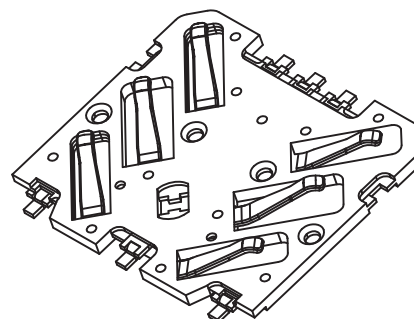



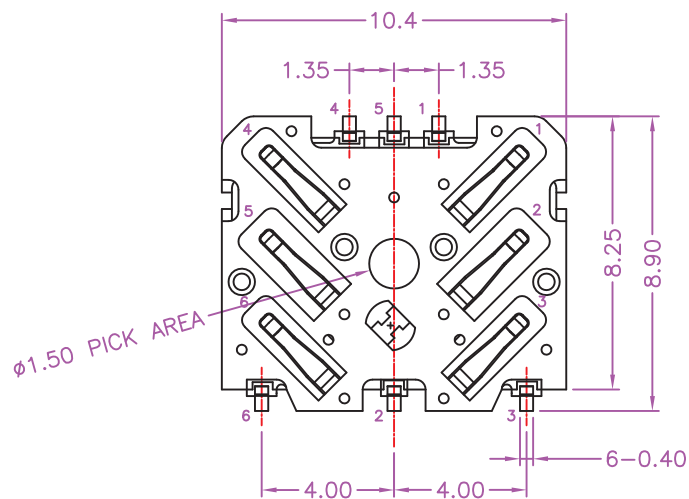

P.C.B LAYOUT
TOP VIEW ±0.05


MATERIALS

HOUSING: LCP (UL 94V-0), BLACK
TERMINAL: COPPER ALLOY, GOLD PLATING

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 100m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+85°C

PIN No.	FUNCTION
PIN 1	VCC
PIN 2	RST
PIN 3	CLK
PIN 4	GND
PIN 5	VPP
PIN 6	I/O

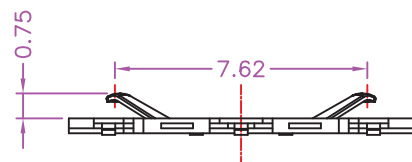

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4


PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 5°

照片框

ORDER INFORMATION

NASCX-W0805X-06-LF

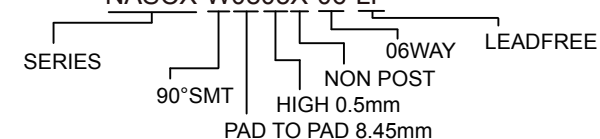

DESCRIPTION: MEMORY CARD SERIES
NANO SIM CARD, 6PIN, PCB MOUNT, SMT FEMALE