


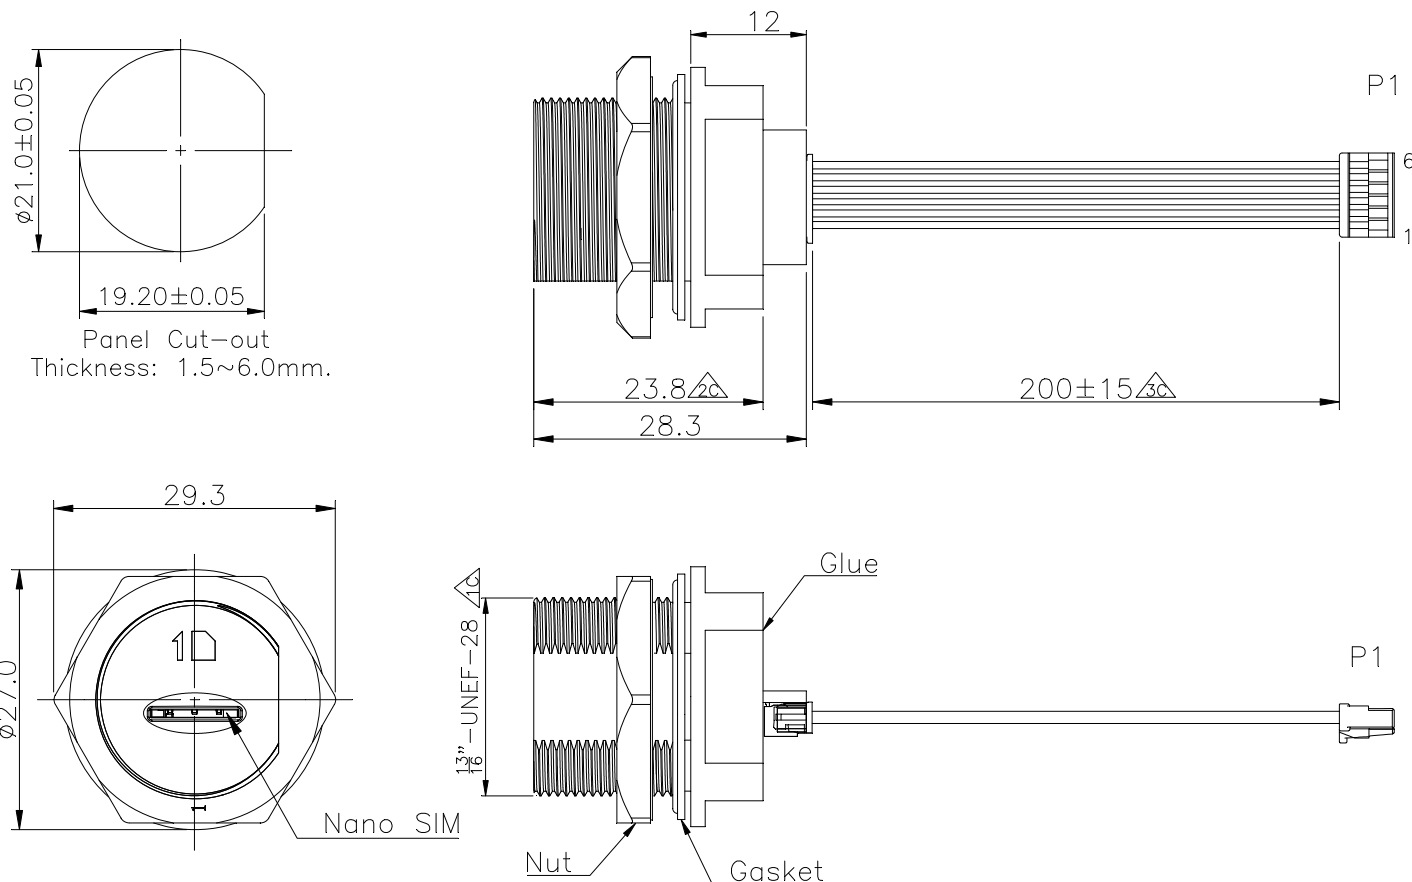

| Nano SIM | Name | Color | P1 |
|----------|------|-------|----|
| C2       | RST  | Gray  | 6  |
| C1,C6    | VDD  | Gray  | 5  |
| C3       | CLK  | Gray  | 4  |
| C7       | DATA | Gray  | 3  |
| CD-Pin   | DET  | Gray  | 2  |
| C5,Shell | GND  | Red   | 1  |

Note:

1. Plastic Housing: Engineering Thermoplastic  
Flammability Rating UL 94V-0.
2. Nut: Engineering Thermoplastic  
Flammability Rating UL 94V-0.
3. Contacts: Phosphor Bronze, Gold Plating Over Nickel In Contact.
4. Gasket: Silicone.
5. SIM: Nano SIM Push, SPPN07-A0-8500.
6. P1 : GHR-06V-S.
7. Cable: UL 2651 28AWG.
8. Nut Installation Torque : 16~18kg-cm.

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X ± 0.50  
X ± 0.38  
.XX ± 0.25  
.XXX ± 0.10  
ANG ± 3°

PPOJECTION

照片框

**ORDER INFORMATION**

**NAX1-0606W1PBNO-F20C-LF**

SERIES

6P6C

WIRE CABLE

PANEL BACK

NUT+O-RING

MALE TO FEMALE

200mm

LEADFREE

DESCRIPTION: Nano SIM With Housing(20cm)