

Features:

- 2 ~ 8 circuits available
- Plastic material: LCP
- Pin material: Brass
- .025"(0.635mm) square pin

Specification:

- Current rating: 4A AC, DC
- Voltage rating: 250V AC, DC
- Contact resistance: 10mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C

Dimensional Information (mm)








Circuits	Dim. A	Dim. B
N	$2.5 \times N - 2.5$	$2.5 \times N + 0.94$

&& N = 2 ~ 8

Ordering Information

Part No.	Color	
NF-PDPBK-1Xxx	Black	Key A
NF-PDPWH-1Xxx	Natural	Key B

&& xx = 02 ~ 08

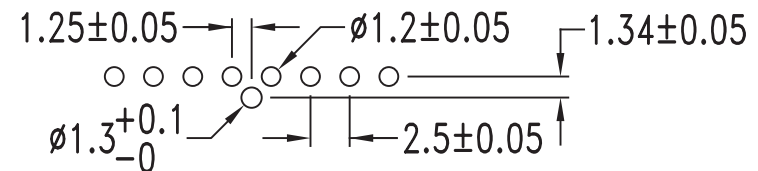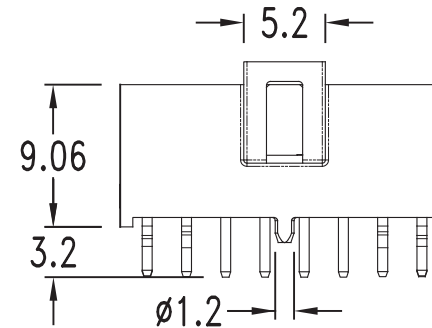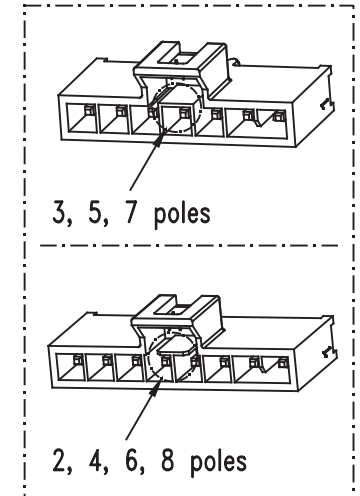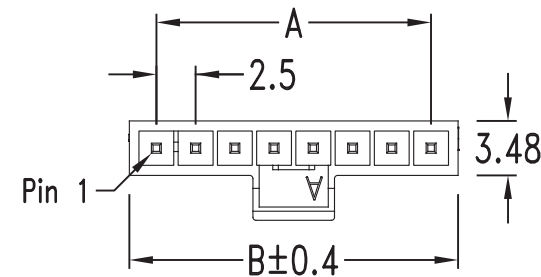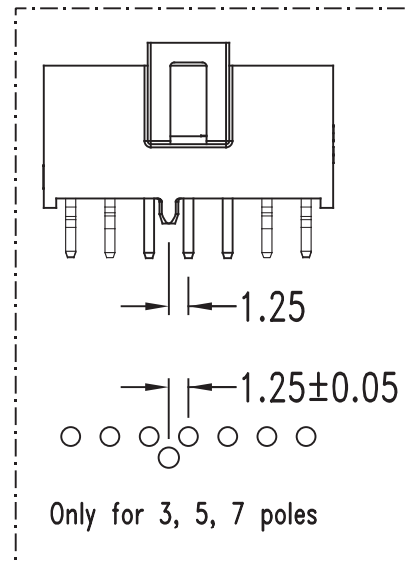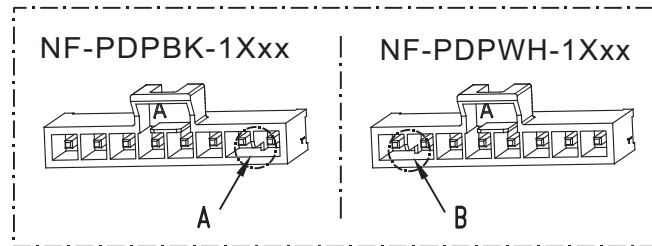

Recommended P. C. B. hole dimension

Recommended P. C. B. thickness 1.6 ~ 2.4mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

NF-PDPxx-1Xxx-LF
SERIES LEADFREE
1X02:02WAY
1X08:08WAY
MALE BK:BLACK
DIP 180° WH:WHITE
POST

DESCRIPTION: .098"(2.5mm) Single Row Vertical Header