
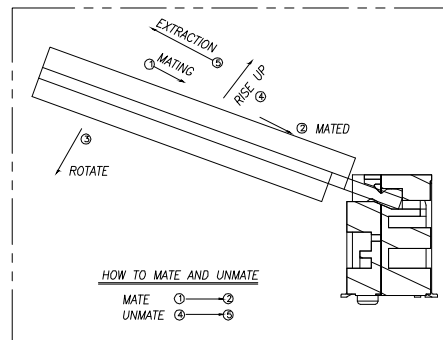
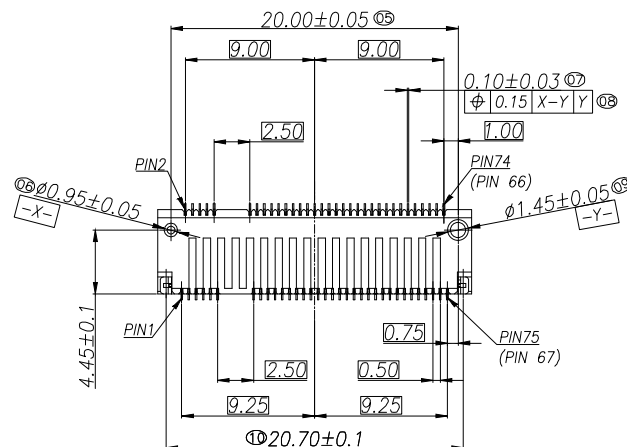
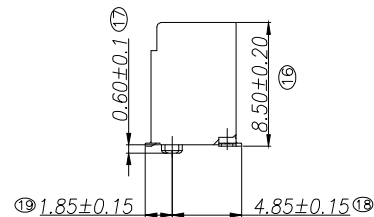
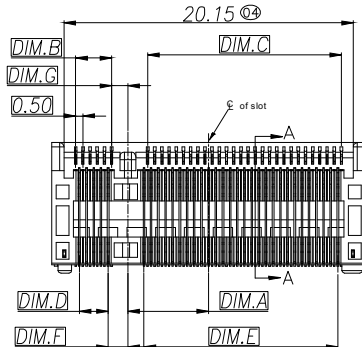



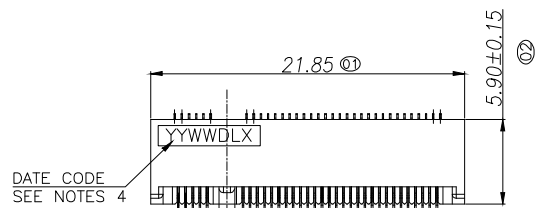

NOTES:

1.MATERIAL:

- 1.1.HOUSING: HIGH TEMPERATURE THERMOPLASTIC,UL94V-0,COLOR:BLACK
- 1.2.CONTACTS: COPPER ALLOY;
- 1.3.PEG: STAINLESS STEEL.

2.REFLOW SOLDER CAPABLE TO 260°C.

3.FINISH:

CONTACT: GOLD(SEE TABLE) PLATED ON CONTACT AREA AND GOLD FLASH SOLDER AREA. 50u" MIN NICKEL UNDERPLATING OVERALL.

PEG: 80u" MIN.MATTE-TIN PLATED ON SOLDERING AREA.

50u" MIN. NICKEL UNDERPLATING.

4. DATE CODE : YYWWDLX

YY: YEAR (09: 2009)

WW: WEEK (25: THE 25TH WEEK)

D: DAY (1~7: SUNDAY~SATURDAY)

L: LINE NUMBER OF ASSEMBLY (A: LINE A)

X: D OR N (D: DAY; N: NIGHT)

5.CONNECTOR ACTUAL PIN QUANTITY IS 67,AS THE KEY TAKING OUT 8 PINS.

NGFF-W85-0760	KEY A	+6.625	1.5	14.5	1.0	14.5	1.125	1.375	
NGFF-W85-5809	KEY M	-6.125	14.0	2.0	14.0	1.5	1.125	1.375	
NGFF-W85-2344	KEY E	2.625	5.5	10.5	5.0	10.5	1.375	1.125	
NGFF-W85-1156	KEY B	5.625	2.5	13.5	2.0	13.5	1.375	1.125	
PART NO.	KFY	NAMF	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

NGFF-W85-xyyy-LF

SERIES

LEADFREE

90°SMT

1156:11+56 WAY
2344:23+44 WAY
5809:58+09 WAY
0760:07+60 WAY
HIGH 8.5mm

DESCRIPTION: