



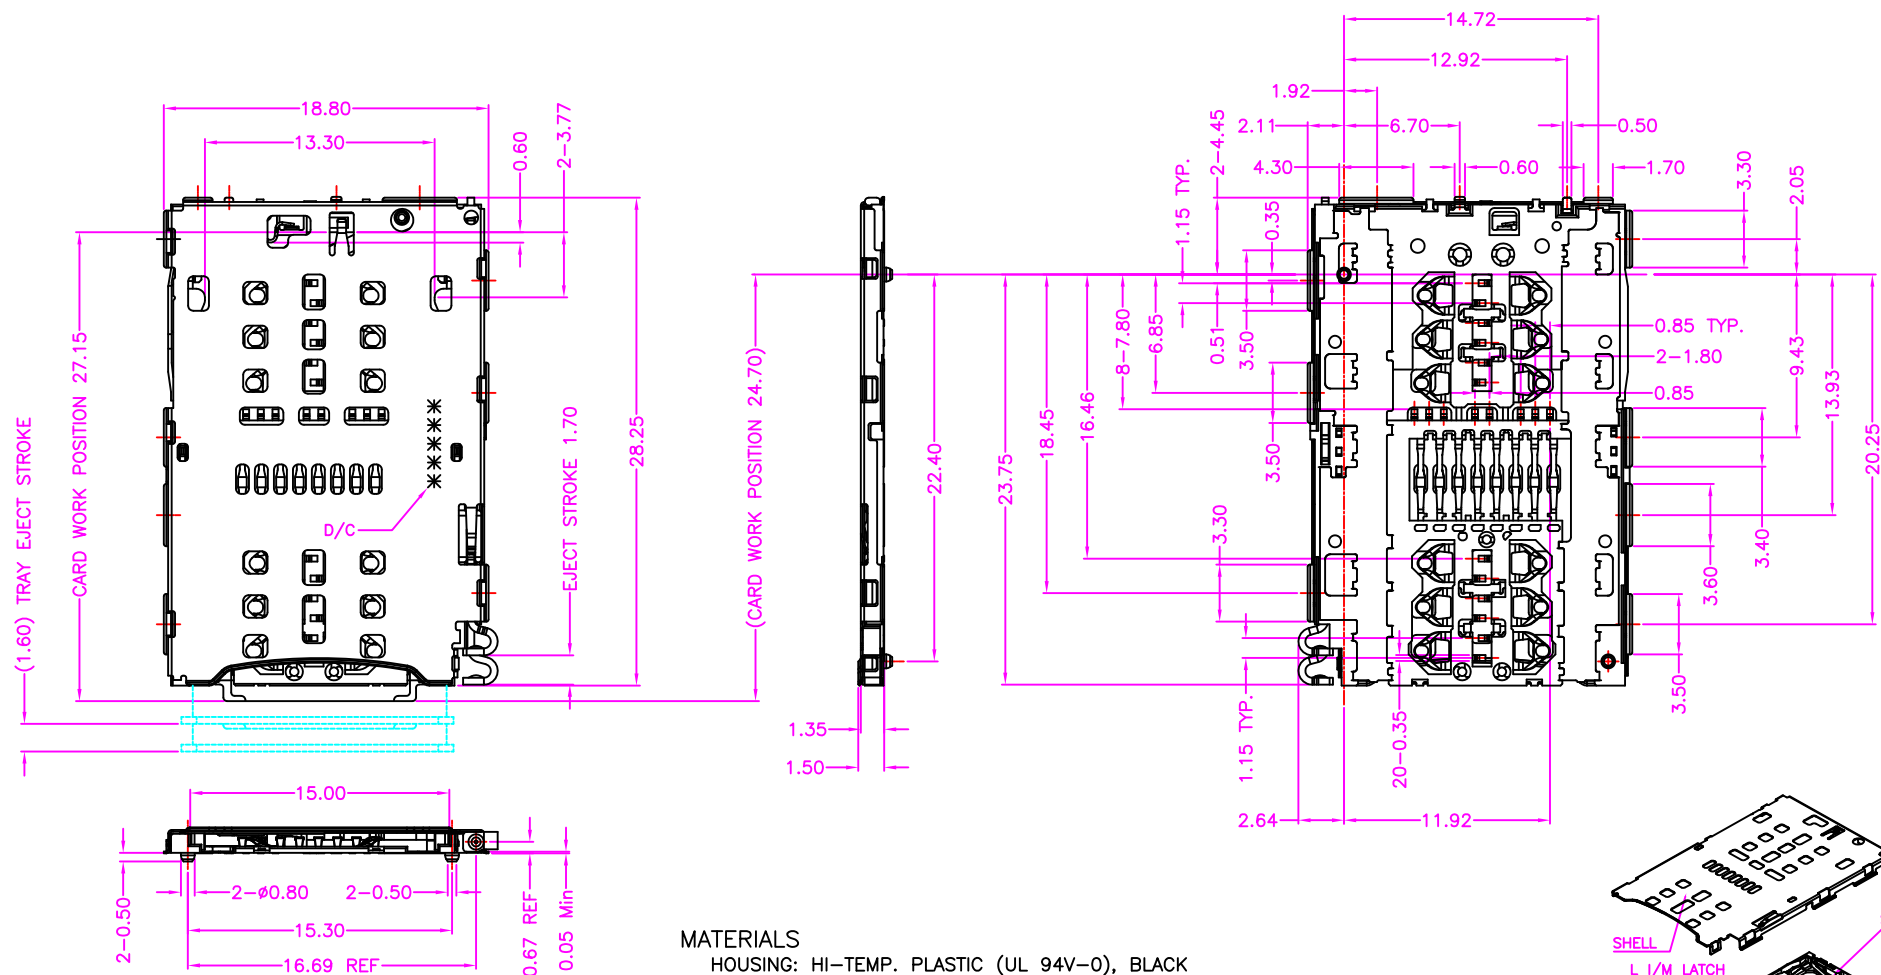

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
 SHELL: STAINLESS STEEL, NICKEL PLATING
 SOLDER PAD: STAINLESS STEEL, GOLD FLASH
 DETECT SWITCH: COPPER ALLOY, GOLD PLATED
 LEVER: STAINLESS STEEL
 CAM: STAINLESS STEEL
 TERMINAL: COPPER ALLOY, GOLD PLATED

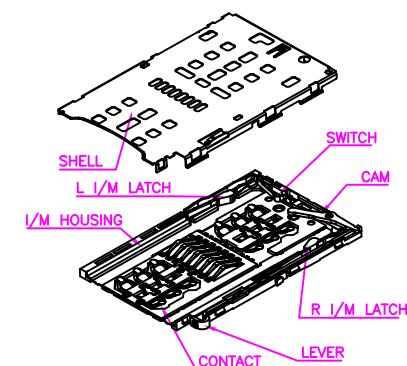

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.40

.X. ± 0.30

.XX. ± 0.20

.XXX. ± 0.10

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

NNTFE-WP15ACR-302-LF

SERIES

90°SMT

REEL

CAP


CLOSED TYPE

POST 15.30

3 IN 2

LEADFREE

DESCRIPTION: NANO SIM & NANO SIM & MICRO SD 3 CHOOSE 2, METAL SHIELD FEMALE, H=1.35mm

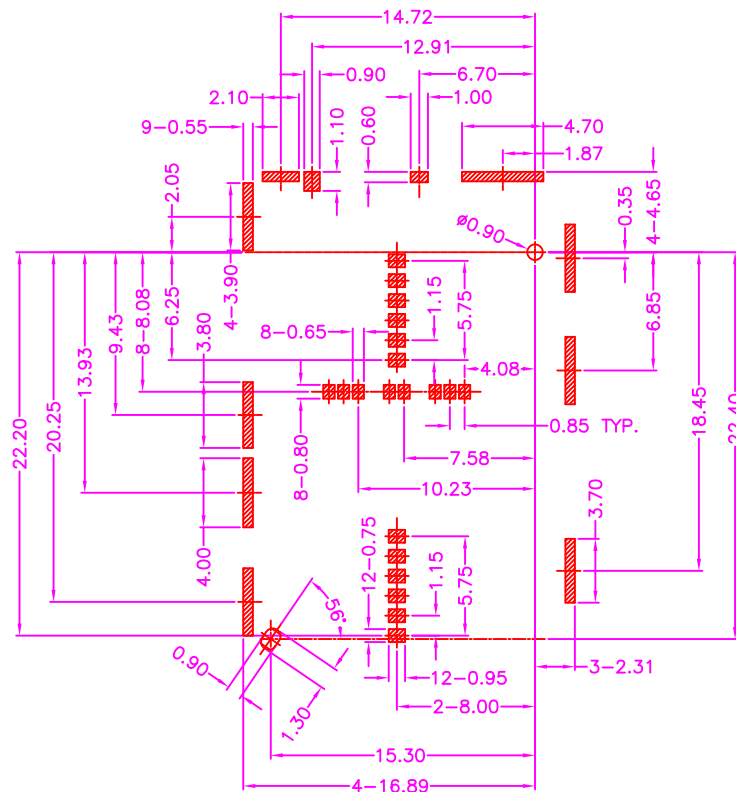


P.C.B LAYOUT
TOP VIEW ±0.05

CONNECTOR PIN ASSIGNMENT:

ITEM	FUNCTION
Micro SD CARD	
P1	DAT2 OF MSD
P2	CD/DAT3 OF MSD
P3	CMD OF MSD
P4	VDD OF MSD
P5	CLK OF MSD
P6	VSS OF MSD
P7	DATO OF MSD
P8	DAT1 OF MSD
SW	TRAY DETECTION SW
S	SHELL GND
NANO SIM CARD	
C1	VCC OF SIM
C2	RST OF SIM
C3	CLK OF SIM
C5	GND OF SIM
C6	VPP OF SIM
C7	DATA OF SIM




CARD PIN ASSIGNMENT:

ITEM	FUNCTION
Micro SD CARD	
P1	DAT2 OF MSD
P2	CD/DAT3 OF MSD
P3	CMD OF MSD
P4	VDD OF MSD
P5	CLK OF MSD
P6	VSS OF MSD
P7	DATO OF MSD
P8	DAT1 OF MSD
NANO SIM CARD	
C1	VCC OF SIM
C2	RST OF SIM
C3	CLK OF SIM
C5	GND OF SIM
C6	VPP OF SIM
C7	DATA OF SIM

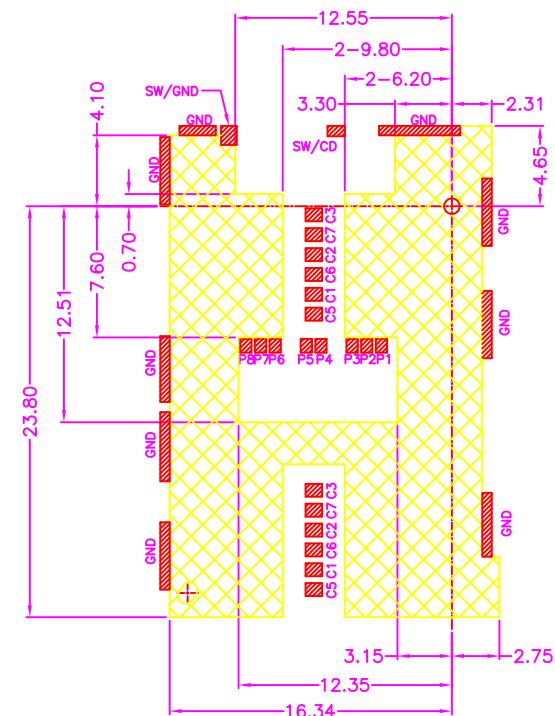

P.C.B LAYOUT
TOP VIEW ±0.05

- THROUGH HOLE
- ▨ SOLDER AREA
- ▤ NO PATTERNS

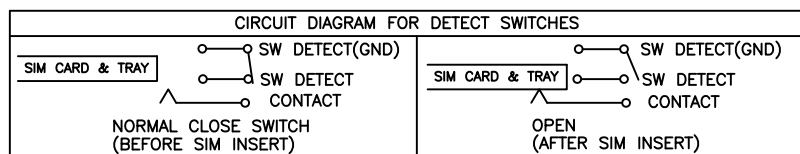

Micro SD CARD ELECTRICAL

NANO SIM CARD ELECTRICAL

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

NNTFE-WP15ACR-302-LF

SERIES

90°SMT

REEL

CAP




POST 15.30

CLOSED TYPE

LEADFREE

3 IN 2

DESCRIPTION: NANO SIM & NANO SIM & MICRO SD 3 CHOOSE 2, METAL SHIELD FEMALE, H=1.35mm

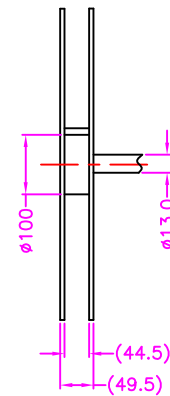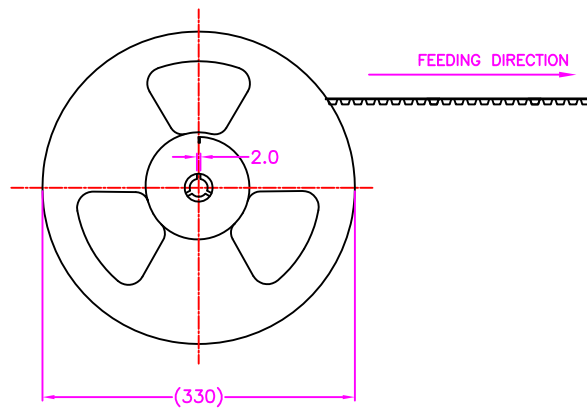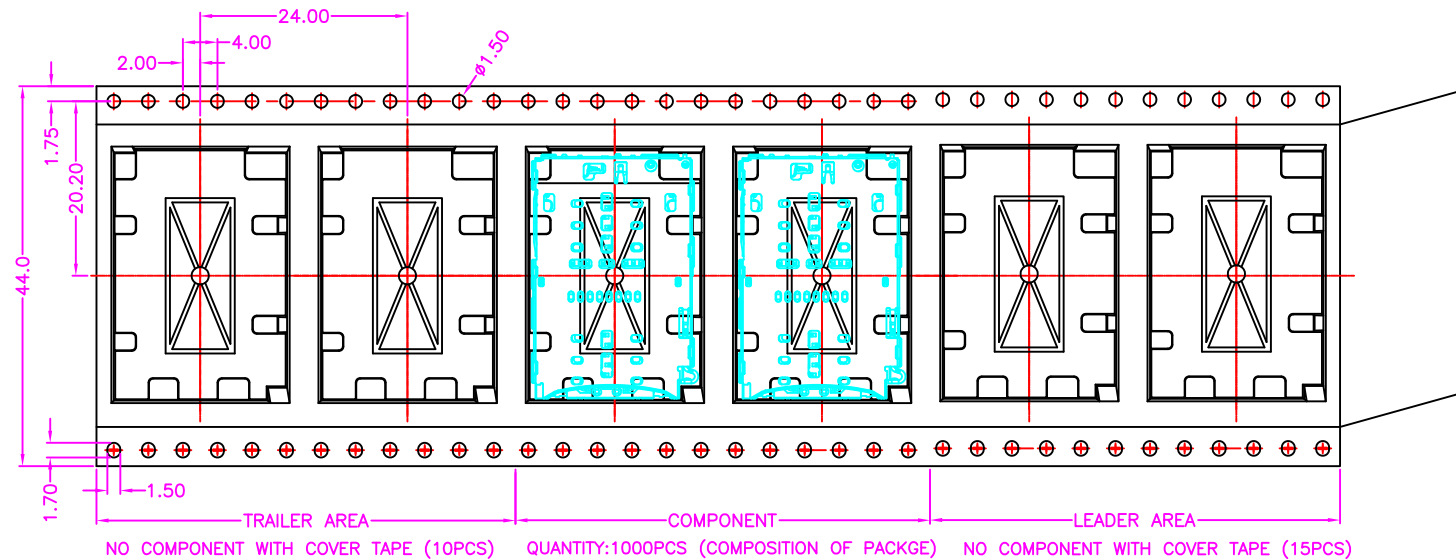

NOTE: 1000PCS/REEL, 6000PCS/ 6REEL/ CARTON

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

NNTFE-WP15ACR-302-LF

SERIES

LEADFREE

3 IN 2

REEL

CAP



CLOSED TYPE

90°SMT

POST 15.30

DESCRIPTION: NANO SIM & NANO SIM & MICRO SD 3 CHOOSE 2, METAL SHIELD FEMALE, H=1.35mm

MATERIALS
SHELL: ALUMINUM ALLOY



照片框

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE _____

SIZE A4

PPOJECTION 

TOLERANCES ARE

 $X. \pm 0.40$
$$X \pm 0.30$$

.XXX ± 0.10

ANG ±

ORDER INFORMATION

NNTFE-WP15ACR-302-LF

SERIES

LEADFREE

3 IN 2

| REEL

CA





—

CLOSED TYPE
OST 15.30

90°SMT



DESCRIPTION:	NANO SIM & NANO SIM & MICRO SD 3 CHOOSE 2, METAL SHIELD FEMALE, H=1.35mm
--------------	--

RECOMMEND PLASTIC TRAY

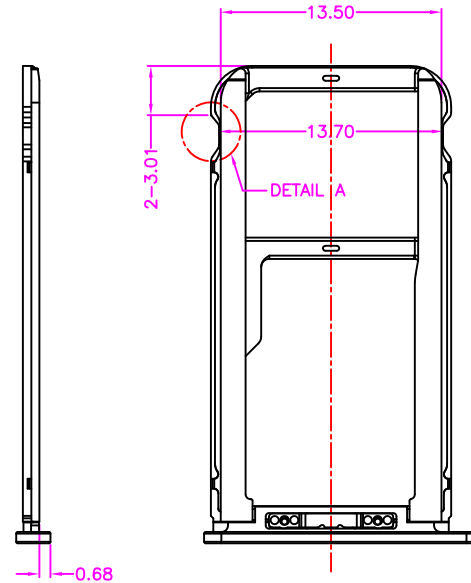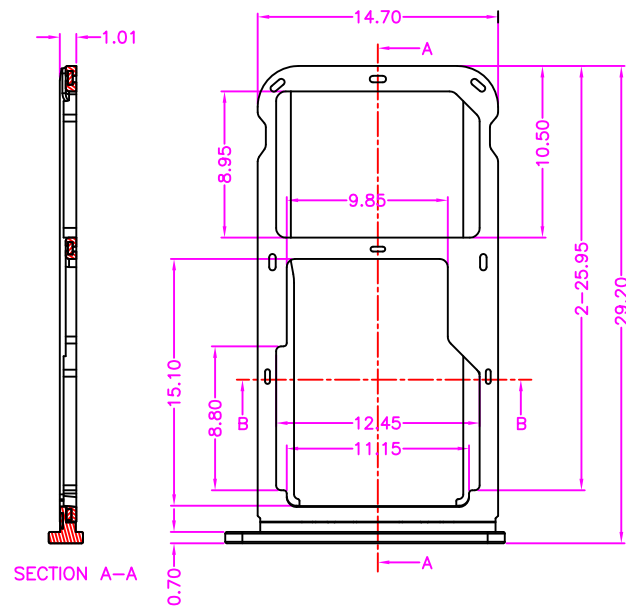

MATERIALS

PLASTIC BODY: NYLON (UL 94V-0), BLACK
 PLATE: STAINLESS STEEL, NICKEL PLATING
 FIXBOARD: STAINLESS STEEL
 DOOR: ALUMINUM

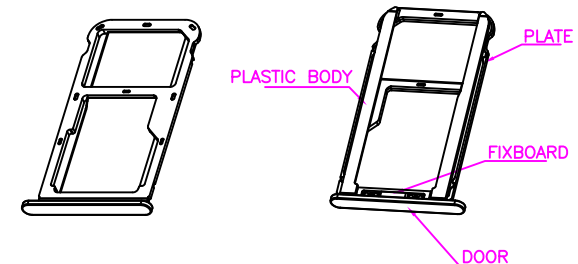

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ± 0.40

.X, ± 0.30

.XX, ± 0.20

.XXX, ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

NNTFE-WP15ACR-302-LF

SERIES

90°SMT

REEL

CAP

CLOSED TYPE

POST 15.30

3 IN 2

LEADFREE

DESCRIPTION: NANO SIM & NANO SIM & MICRO SD 3 CHOOSE 2, METAL SHIELD FEMALE, H=1.35mm