


Recommended PC board pattern
(TOP VIEW)

SPECIFICATIONS

- 1.CURRENT RATING: 1.34A .
- 2.VOLTAGE RATING 155 VAC.
- 3.OPERATING TEMPERATURE RANGE:-55°C TO +125°C
- 4.HIGH-SPEED CHANNEL PERFORMANCE 56Gbps

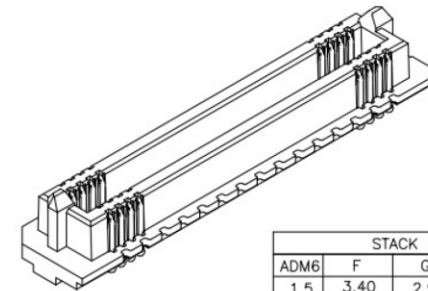

| STACK HEIGHT | | | | |
|--------------|-------|------|-------|-------|
| ADM6 | F | G | H | R |
| 1.5 | 3.40 | 2.90 | 0.800 | 3.32 |
| 3.5 | 5.40 | 4.90 | 2.800 | 15.32 |
| 6.5 | 8.40 | 7.90 | 5.800 | 8.32 |
| 8.5 | 10.40 | 9.90 | 7.800 | 10.32 |

| STACK HEIGHT | | | | |
|--------------|------|-------|-------|-------|
| ADF6 | ADM6 | | | |
| | 1.5 | 3.5 | 6.5 | 8.5 |
| 3.5 | 5.00 | 7.00 | 10.00 | 12.00 |
| 7.5 | 9.00 | 11.00 | 14.00 | 16.00 |

| Circuits | A | B | C | D |
|----------|-------|--------|--------|-------|
| 4x10 | 11.07 | 5.715 | 8.395 | 8.52 |
| 4x20 | 17.42 | 12.065 | 14.745 | 14.87 |
| 4x30 | 23.77 | 18.415 | 21.095 | 21.22 |
| 4x40 | 30.12 | 24.765 | 27.445 | 27.57 |
| 4x50 | 36.47 | 31.115 | 33.795 | 33.92 |
| 4x60 | 42.82 | 37.465 | 40.145 | 40.27 |
| 4x70 | 49.17 | 43.815 | 46.495 | 46.62 |
| 4x80 | 55.52 | 50.165 | 52.845 | 52.97 |
| 4x90 | 61.87 | 56.515 | 59.195 | 59.32 |
| 4x100 | 68.22 | 62.865 | 65.545 | 65.67 |

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.13
.XXX ± 0.05
ANG ± 2°

P PROJECTION

照片框

ORDER INFORMATION

NP064K-PV015P-xxx-LF

SERIES

LEADFREE

040-400WAY

POST

UNMATED HIGH/ 1.5mm

180°SMT

MALE

DESCRIPTION: 0.365mm BTB PLUG