




Diagram	Molding description
○	mass production & assemble mold
⊙	sample & assemble mold
⊕	mass production & fix mold
⊗	sample & fix mold

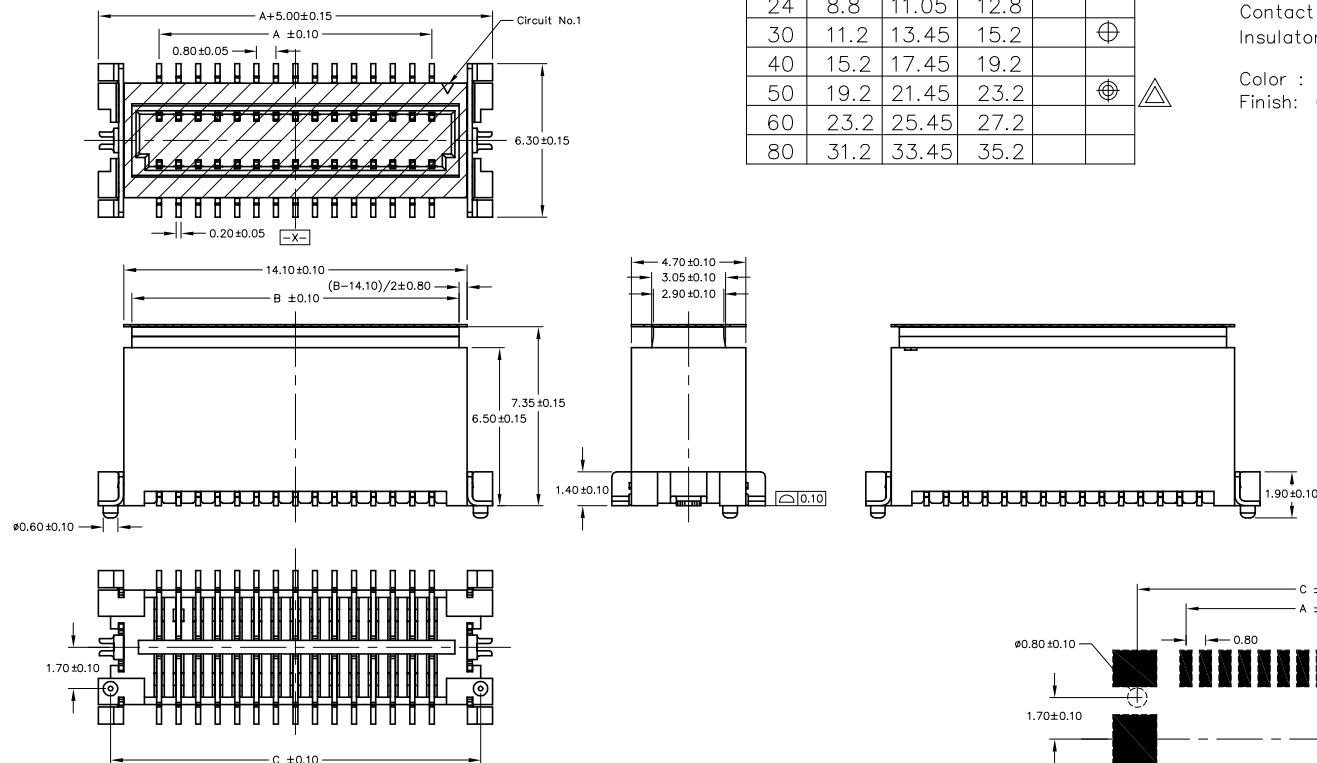

CIRCUITS	DIM.A	DIM.B	DIM.C	W/O PEG	WITH PEG
14	4.8	7.05	8.8		
16	5.6	7.85	9.6		
24	8.8	11.05	12.8		
30	11.2	13.45	15.2		⊕
40	15.2	17.45	19.2		⊕
50	19.2	21.45	23.2		⊕
60	23.2	25.45	27.2		⊕
80	31.2	33.45	35.2		⊕

SPECIFICATIONS

Current Rating: 0.5 Amps
 Insulator resistance: 100 Megohms Min.
 Contact resistance: 70 m ohm Max.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40°C~+85°C
 Contact Material: Phosphor bronze
 Insulator Material: High Temperature Thermoplastic, UL 94V-0
 Color : Natural
 Finish: Gold all over nickel

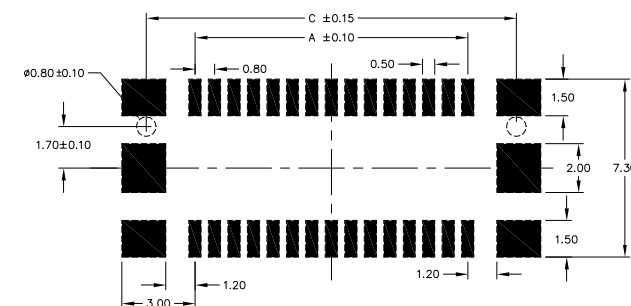

RECOMMENDED P.C.B LAYOUT (TOP VIEW)
(PCB TOLERANCE ±0.05)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

NP0821-P65EP2C-xxx-LF

SERIES

MALE

EAR

POST

UNMATED

CAP

014~080WAY

LEADFREE

UNMATED HIGH 6.50mm

DESCRIPTION: