

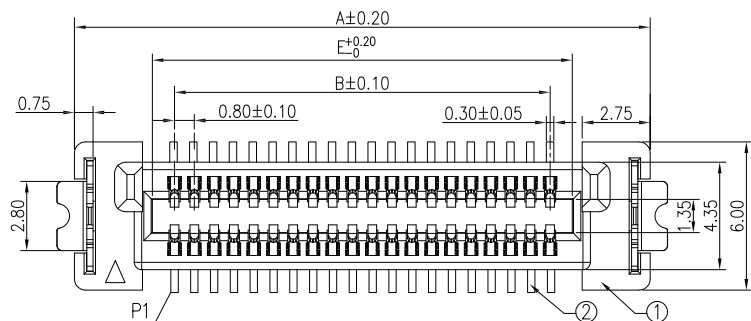


:1.25:1

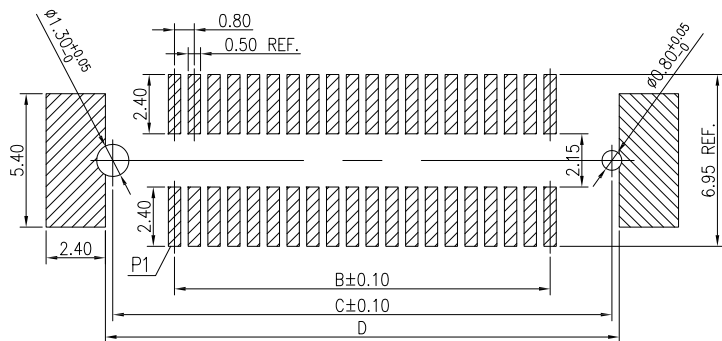


RECOMMENDED P.C.B LAYOUT (COMPONENT SIDE)

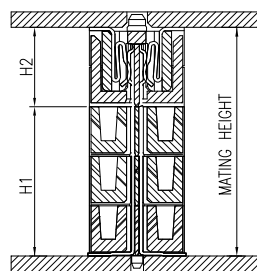

MATING HEIGHT

NOTES:

- 1.HOUSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
- 2.TERMINAL:PHOSPHOR BRONZE
PLATING:GOLD FLASH IN CONTACT AREA/100μ"MIN.MATTE TIN
PLATE IN SOLDER AREA.OVERALL 50μ" MIN. NICKEL.

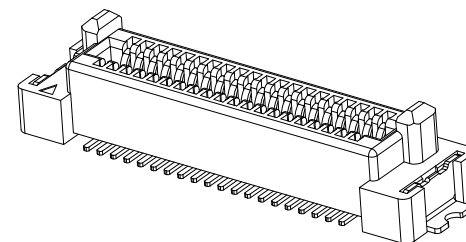

3D VIEW

No.	DESCRIPTION	MATERIAL	COLOR	REMARK
1	HOUSING	HIGH TEMP	BLACK	UL94V-0
2	TERMINAL	COPPER ALLOY	—	GOLD/TIN

NO.of contacts	Dimensions				
	A.	B.	C.	D.	E.
10	11.3	3.2	8.2	8.8	4.9
20	15.3	7.2	12.2	12.8	8.9
30	19.3	11.2	16.2	16.8	12.9
40	23.3	15.2	20.2	20.8	16.9
50	27.3	19.2	24.2	24.8	20.9
60	31.3	23.2	28.2	28.8	24.9
70	35.3	27.2	32.2	32.8	28.9
80	39.3	31.2	36.2	36.8	32.9
100	47.3	39.2	44.2	44.8	40.9
120	55.3	47.2	52.2	52.8	48.9
140	63.3	55.2	60.2	60.8	56.9
160	71.3	63.2	68.2	68.8	64.9
180	79.3	71.2	76.2	76.8	72.9
200	87.3	79.2	84.2	84.8	80.9

MATING HEIGHT	H1	H2
5.0	4.5	4.0
8.0	7.5	4.0
10	4.5	9.0
13	7.5	9.0
15	9.5	9.0
18	12.5	9.0
20	14.5	9.0
23	17.5	9.0
25	19.5	9.0

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 0° 30'

照片框

ORDER INFORMATION

NP0843-SxxxEP1-xxx-LF

SERIES

LEADFREE

POST

EAR

FEMALE

010~200WAY

005:UNMATED HIGH 0.50mm

055:UNMATED HIGH 5.50mm

DESCRIPTION: 0.8mm BTB SOCKET