
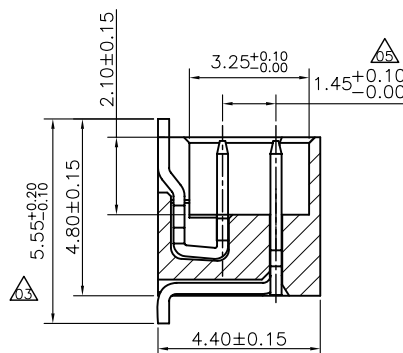
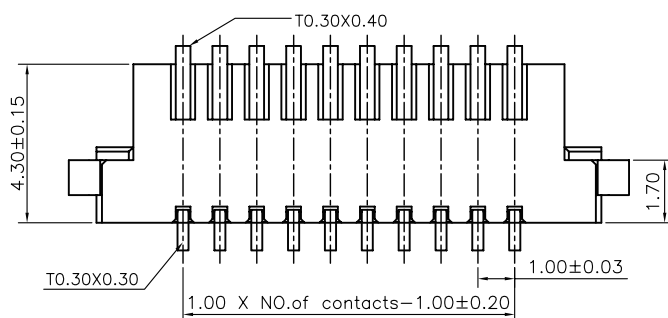


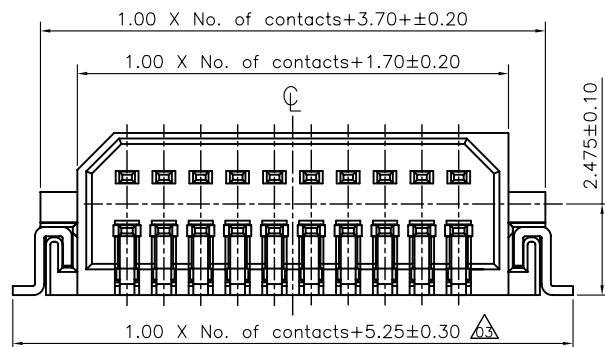

Specifications

Current Rating: 1Amp

Insulation Resistance: 1000MΩMin.

Dielectric Withstanding: 300VAC

Contact Resistance: 20mΩMax.


Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze

Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon or the equivalent material.

Recommended P.C.Board Layout

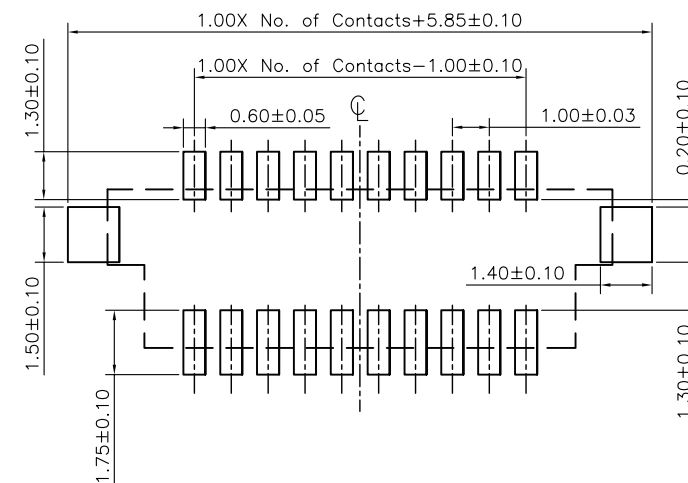

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

NP1014-PWR-xx-LF

SERIES

LEADFREE

05~15WAY




REEL

90°SMT

MALE

DESCRIPTION: 1.00Pitch ROWS BASE Board to Board MALE

封裝時收料方向

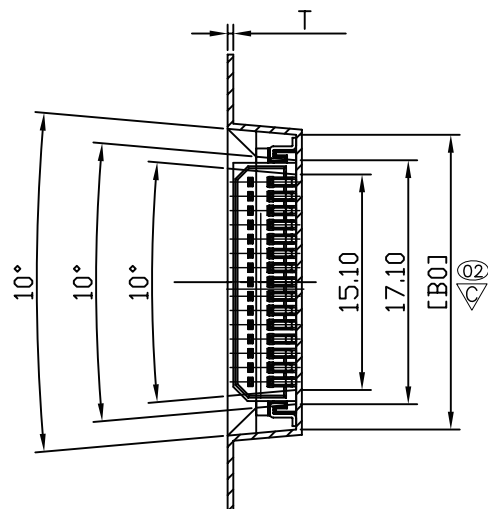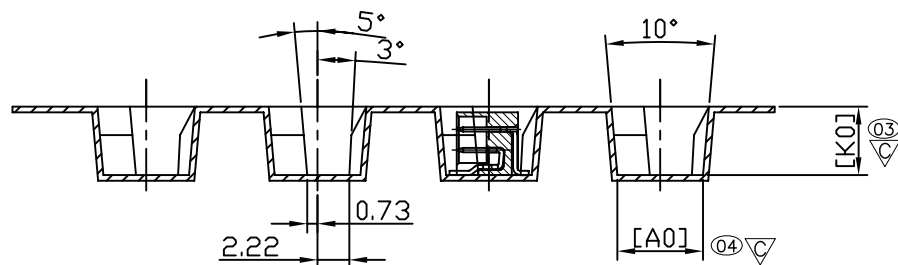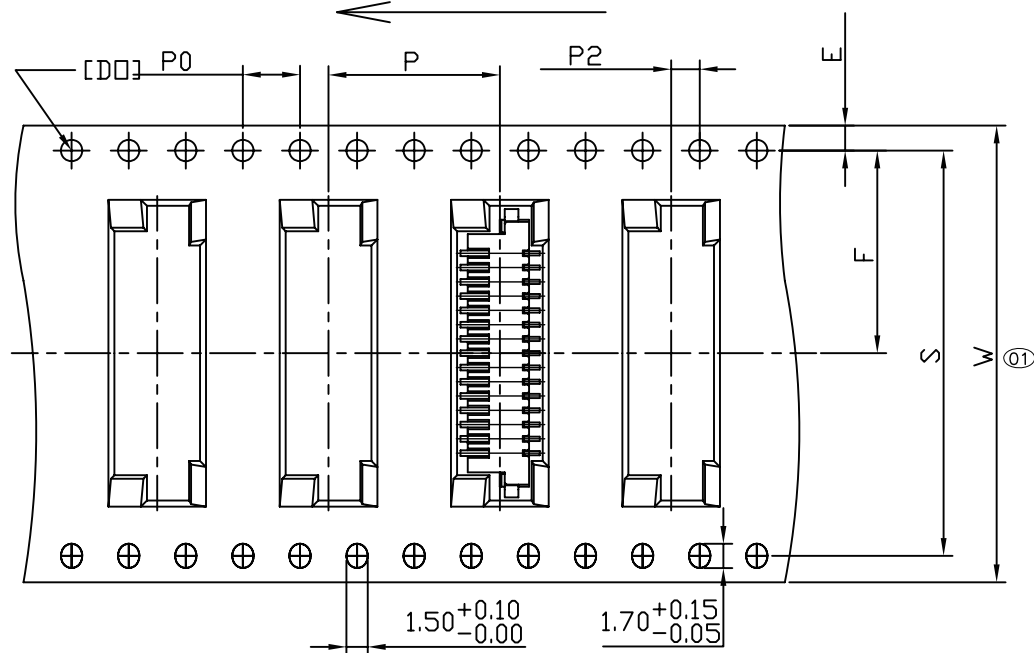

Notes:

1. Packing Conforms EIA-481-B Standards.
2. 10 sprocket hole pitch cumulative
3. Carrier camber is within 1mm in 250mm.
4. Material: BLACK Polystyrene.
5. Packing length per 13" Reel: 13 Meters.
6. Component load per 13" Reel: 1000 PCS.
7. "XX" SHOULD BE MEASURED BY FAI.
8. "▽" MUST BE CONTROLLED BY QC.

W	32.00 ± 0.30	T	0.40 ± 0.05	P ₀	4.00 ± 0.10	A ₀	6.00 ± 0.10
S	28.40 ± 0.10	F	14.20 ± 0.10	P ₂	2.00 ± 0.10	B ₀	20.65 ± 0.10
E	1.75 ± 0.10	P	12.00 ± 0.10	D ₀	$\phi 1.50 \pm 0.10$	K ₀	5.00 ± 0.10

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

NP1014-PWR-xx-LF

SERIES

LEADFREE

05~15WAY

REEL

90°SMT

MALE

DESCRIPTION: 1.00Pitch ROWS BASE Board to Board MALE