


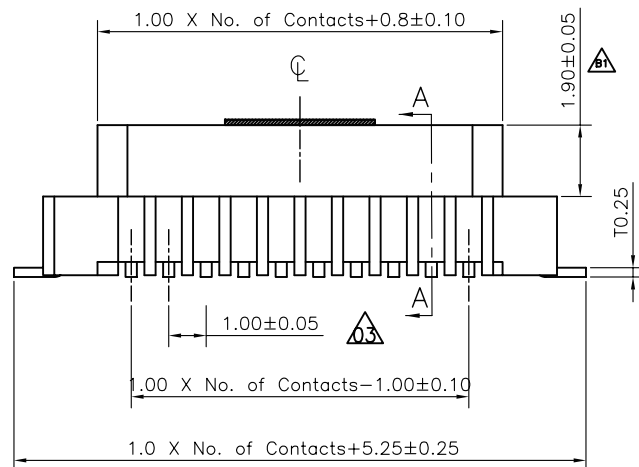


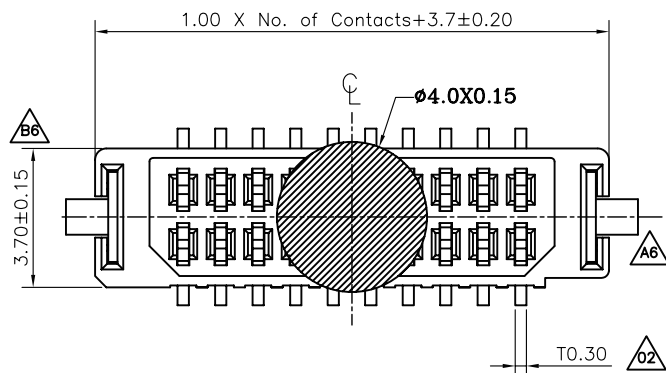

- NOTES:
1. UNLESS OTHERWISE SPECIFIED, ALL RADII ARE 0.5 MM.
 2. MATERIAL: High Temperature Thermoplastic, UL 94V-0 (Nylon) or the equivalent material, COLOR: BEIGE; T/FORK LOCK: Phosphor Bronze
 3. BURR: 0.08mm (MAX.)
 4. WARPAGE: 0.25mm (MAX.)
 5. LOGO, MARKING, AND CAVITY NO. SHOULD BE CLEAR, AND THEIR HEIGHT SHOULD BE LOWER THAN THE SURFACE.

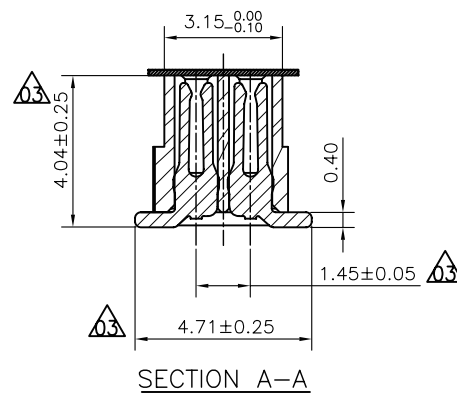

Recommended P.C.Board Layout

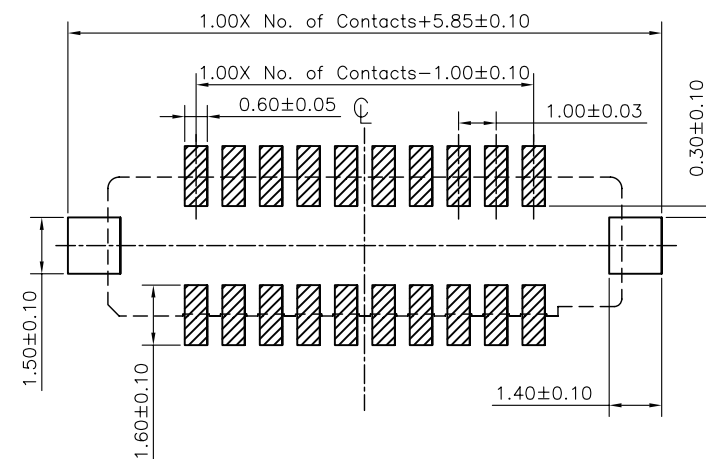

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

NP1014-SVCR-xx-LF

SERIES

REEL

CAP



180°SMT

FEMALE

LEADFREE
05~15WAY

DESCRIPTION: 1.00 PITCH FEMALE BOARD TO BOARD TYPE

封装时收料万向

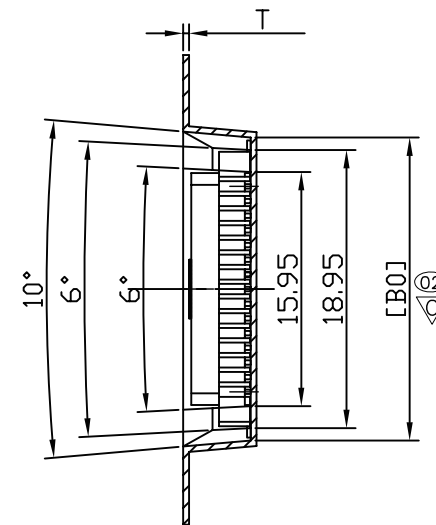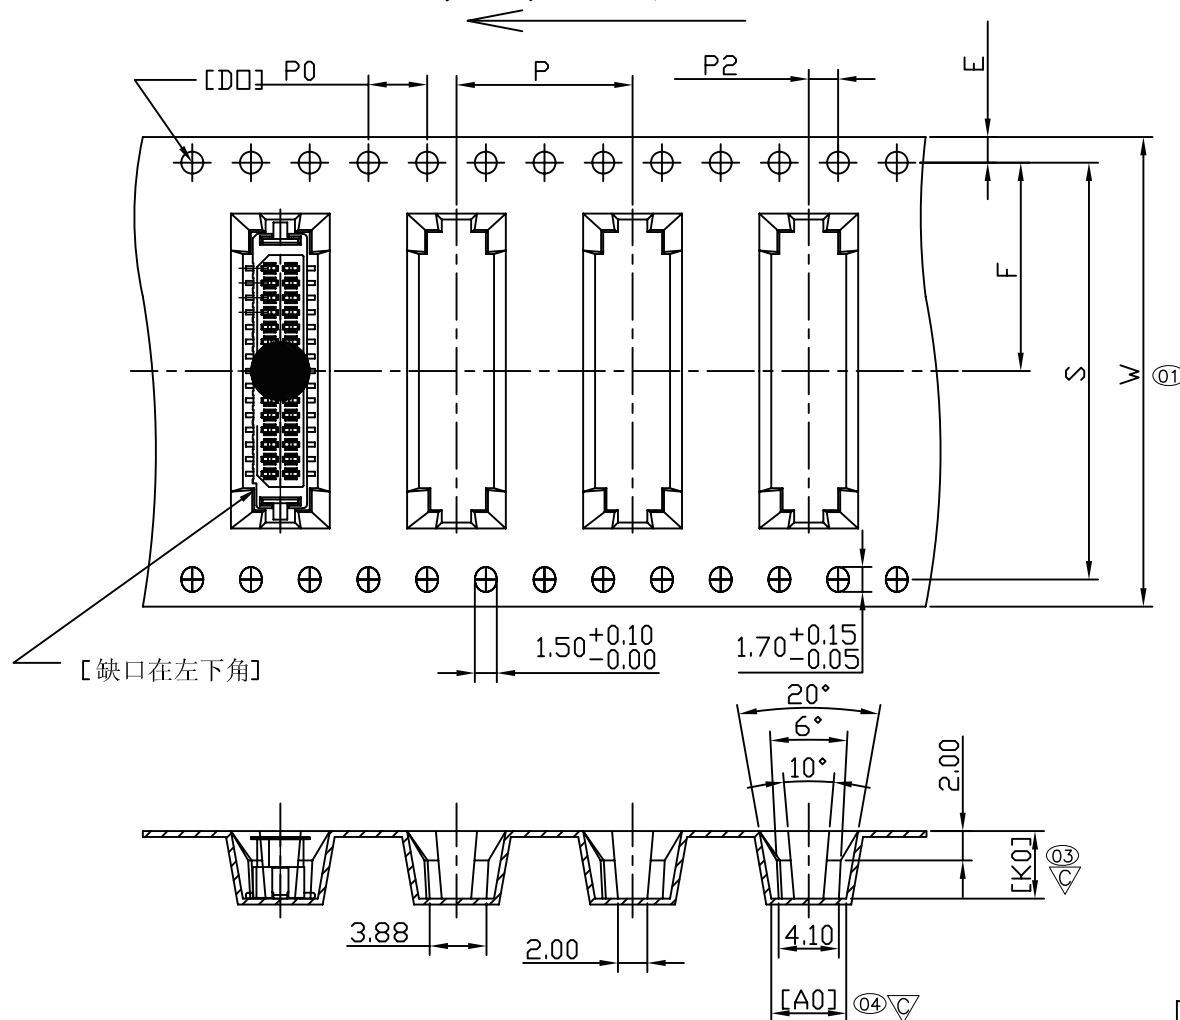

Notes:

- 1.Packing Conforms EIA-481-B Standards.
- 2.10 sprocket hole pitch cumulative
- 3.Carrier camber is within 1mm in250mm.
- 4.Marerial:BLACK Polystyrene.
- 5.Packing length per 13"Reel:13Meters.
- 6.Component load per 13"Reel:1000PCS.
7. "XX" SHOULD BE MEASURED BY FAI.
8. "▽" MUST BE CONTROLLED BY QC.

W	32.00 ^{+0.30} _{-0.30}	T	0.40±0.05	Po	4.00±0.10	Ao	5.11±0.10
S	28.40±0.10	F	14.20±0.10	P2	2.00±0.10	Bo	20.65±0.10
E	1.75±0.10	P	12.00±0.10	Do	Ø1.50 ± ^{0.10} ₀	Ko	4.60±0.10

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

NP1014-SVCR-xx-LF

SERIES

REEL

CAP

180°SMT

FEMALE

LEADFREE

05~15WAY

DESCRIPTION: 1.00 PITCH FEMALE BOARD TO BOARD TYPE